

# GS2906B

## 500mA Ultra Low Dropout Regulator

### Product Description

The GS2906B is a high performance positive voltage regulator designed for use in applications requiring very low input voltage and very low dropout voltage at 600mA amps. It operates with a  $V_{IN}$  as low as 2.5V, with output voltage programmable as low as 0.8V. GS2906B has an enable pin to further reduce power dissipation while shut down. The enable pin may be tied to  $V_{IN}$  if it is not required for ON/OFF control. The GS2906B provides excellent regulation over variations in line, load and temperature.  $V_{out}$  can be programmed from 0.8V to 5V with two external resistors. The optimum thermal condition has to consider the layout placement and application to achieve its satisfied high output current requirement.

The GS2906B is SOT-23-5L packages.


### Features

- Typically 370mV Dropout @500mA
- Input Voltage Range: 2.5V to 6V
- Enable Function
- Over Current and Over Temperature Protection
- 40 $\mu$ A Quiescent Current in Shutdown
- Shout down current < 1uA
- P-CH Design to Reduce the Operation Current
- Adjustable Output Voltage Range 0.8V to 5V
- Output Voltage Accuracy  $\pm 2\%$
- Built-In Short Circuit Protection

### Applications

- Battery Powered Systems
- Telecom/Networking Cards
- Industrial Applications
- Camera Module


### Typical Application Circuit

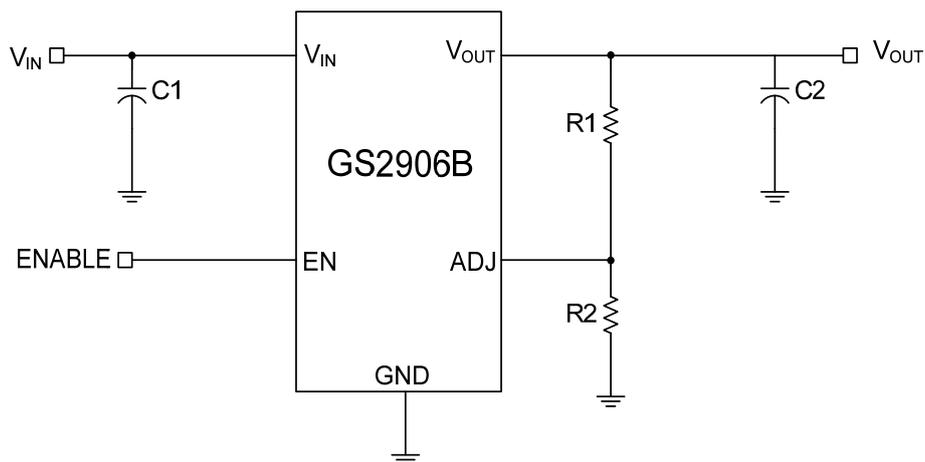

$$V_{OUT} = \frac{0.8(R1+R2)}{R2} \text{ Volts}$$


\* When  $V_{out} \leq 1.2V$ , Recommend  $C2 = 10pF$

## Packages & Pin Assignments

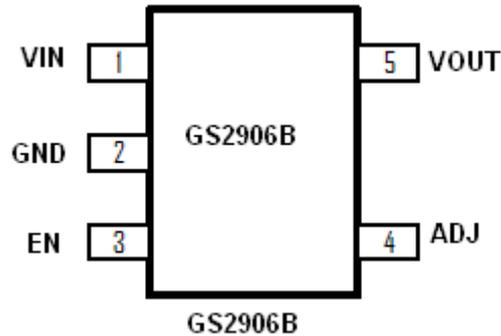

Pin Name	Pin Description
V <sub>IN</sub>	Input Voltage. 1uF capacitance should be placed closely to Vin
GND	Reference Ground.
EN	Enable Input. Pulling this pin to “High” turn on the IC, pulling this pin to “Low” turn off the IC.
ADJ	This is the input to the error amplifier. The ADJ reference voltage is 0.8Vreferenced to ground. $V_{OUT} = \frac{0.8(R1+R2)}{R2} = \text{Volts}$
V <sub>OUT</sub>	The pin is the power output of the device, connect 2.2uF capacitor to GND. Vout ≤ 1.2V, Recommend using 10pF capacitor.

## Ordering & Marking Information

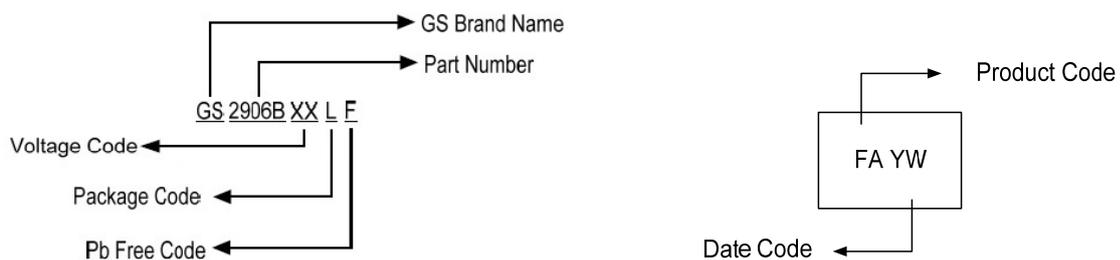

Part Number	Package	Top Marking (Product Code)	Output Voltage
GS2906BLF	SOT-23-5L	FAYW	Adjustable
GS2906B12LF	SOT-23-5L	12_YW	1.2V
GS2906B18LF	SOT-23-5L	18_YW	1.8V
GS2906B28LF	SOT-23-5L	28_YW	2.8V
GS2906B33LF	SOT-23-5L	33_YW	3.3V

## Absolute Maximum Ratings (Note1)

Symbol	Parameter	Range	Unit
$V_{IN}$	Supply Voltage	-0.3~8	V
Other Pin Voltage	Control Voltage	$V_{in}-0.3\sim V_{in}+0.3$	V
$T_J$	Junction Temperature	125	°C
$T_{LEAD}$	Lead Temperature(Soldering) 5 Sec.	260	°C
$T_{STG}$	Storage Temperature Range	-55 to +150	°C
$P_D$	Power Dissipation, $P_D$ @ $T_A=25^\circ\text{C}$	300	mW
$\theta_{JA}$	Thermal Resistance Junction to Ambient	333	°C/W
$\theta_{JC}$	Thermal Resistance Junction to Case	106.6	°C/W

## Recommended Operating Conditions

$V_{IN}$	Supply Voltage	6	V
$T_J$	Operating Junction Temperature Range	-40 to +125	°C
$T_A$	Operating Ambient Temperature Range	-40 to +85	°C


## Electrical Characteristics

( $V_{in}=5V$ , unless otherwise specified Typical values are at  $T_A=T_J=25^\circ\text{C}$ .)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IN}$	Supply Voltage Range		2.5		6	V
$I_{OUT}$	Supply Current			500		mA
$I_Q$	Quiescent Current	$V_{adj}=1V$		40		uA
$V_{adj}$	Reference Voltage		0.775	0.8	0.825	
$V_{OUT}$	Output Voltage	$V_{IN}=V_{OUT}+0.8V$ , $I_{LOAD}=10mA$	-2.0	$V_{OUT}$	2.0	%
Reg_line	Line Regulation	$2.5V < V_{in} < 5.5V$		0.075		%/V
Reg_load	Load Regulation	$0mA < I_{out} < 500mA$		0.6		%/A
$V_{DROP}$	Dropout Voltage	$I_{out}=100\text{ mA}$ $I_{out}=300\text{ mA}$ $I_{out}=500\text{ mA}$		75 225 370		mV
$I_{CL}$	Current Limit			1050		mA
Softstart Time				30	60	uS
$V_{ADJ}$	Adjust Pin Current	$V_{ADJ}=V_{REF}$		80	200	nA
<b>EN</b>						
$V_{IH}$	Enable Pin Threshold		1.5			V
$V_{IL}$					0.5	V
<b>Over Temperature Protection</b>						
$T_{HI}$	High Trip Level			150		°C

## Typical Performance Characteristics


Dropout Voltage  $V_{in}=5V$

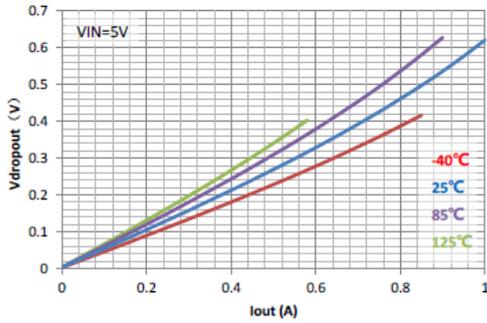


Dropout Voltage  $V_{in}=3.5V$

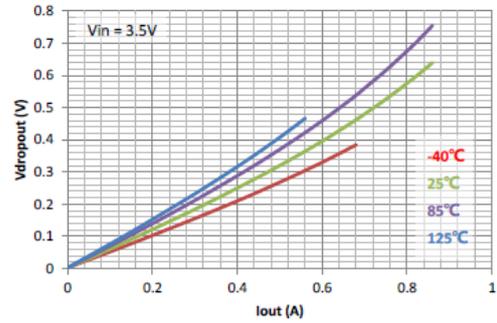


Dropout Voltage  $V_{in}=2V$

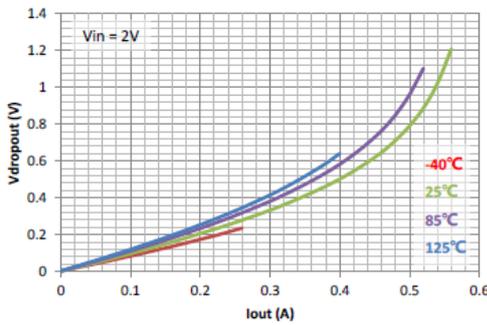


Quiescent current  $V_{out}=3.3V$

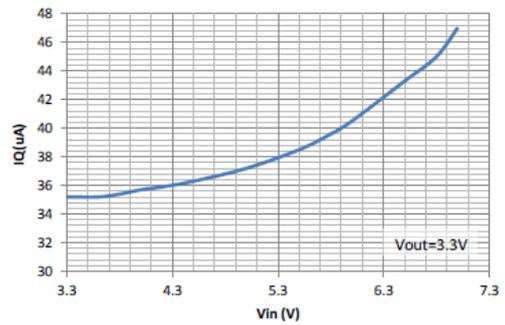


Line Regulation  $V_{out}=3.3V$

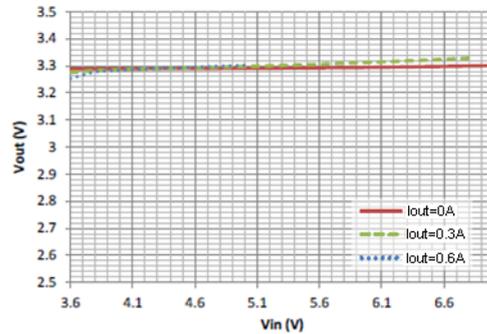


Load Regulation  $V_{out}=3.3V$

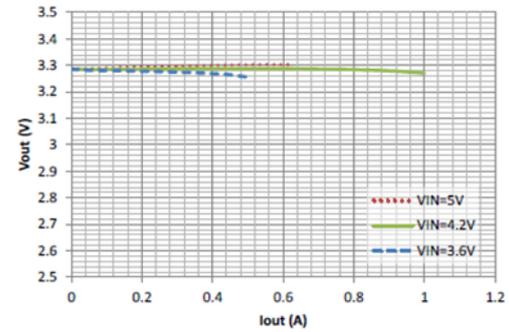


Line Regulation  $V_{out}=0.8V$

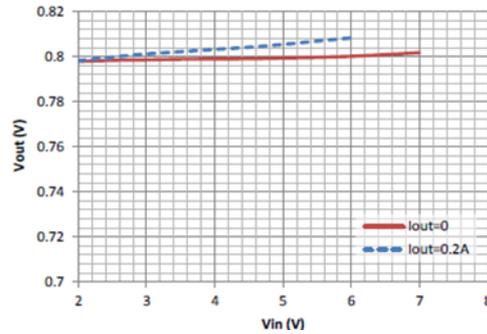


Load Regulation  $V_{out}=0.8V$

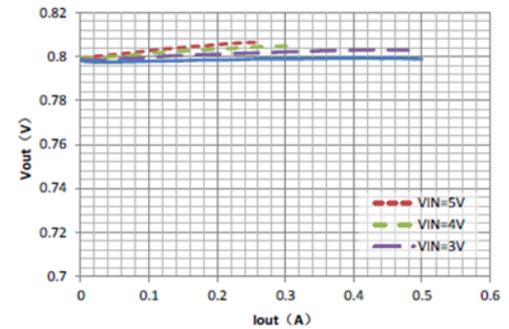

Load Transient Response at  $I_{out}=600\text{mA}$ ,  $V_{out}=3.3\text{V}$

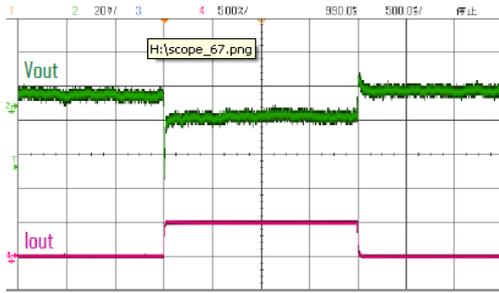


Startup Waveform at  $I_{out}=200\text{mA}$ ,  $V_{out}=3.3\text{V}$

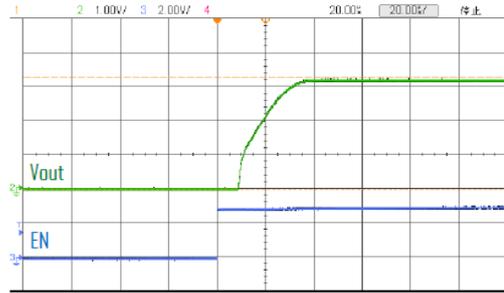

## Package Dimension

### SOT-23-5L

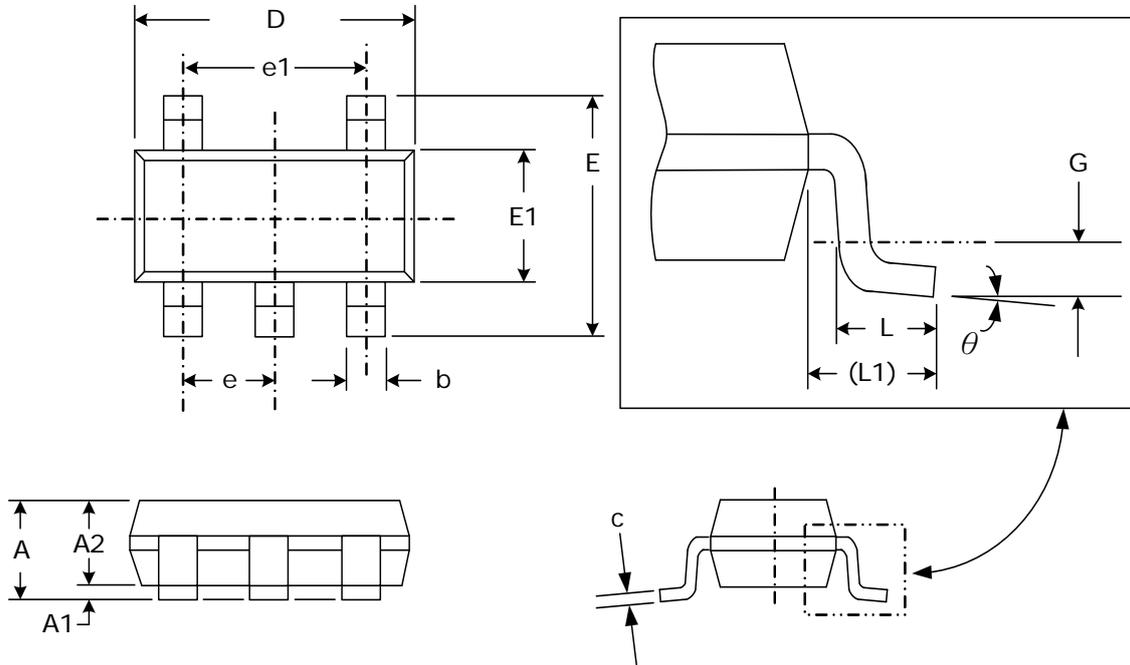

Dimensions				
SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	0.95	1.45	.037	.057
A1	0.05	0.15	.002	.006
A2	0.90	1.30	.035	.051
b	0.30	0.50	.012	.020
c	0.08	0.20	.003	.008
D	2.70	3.10	.106	.122
E	2.50	3.10	.0984	.122
E1	1.50	1.80	.059	.0071
e	0.95 (TYP)		.037 (TYP)	
e1	1.90 (TYP)		.075 (TYP)	
L	0.35	0.55	.014	.022
L1	0.60 (TYP)		.024 (TYP)	
G	0.25 (TYP)		.010 (TYP)	
theta	0°	8°	0°	8°

## NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

## CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587