

GSTMMBT3904W

NPN General Purpose Transistor


Product Description


This device is designed as a general purpose amplifier and switch.

Features

- Collector-Emitter Voltage : 40V
- Collector-Base Voltage : 60V
- Collector Current-Continuous : 200mA
- Lead(Pb)-Free

Packages & Pin Assignments


GSTMMBT3904WF(SOT-323)	
	
Pin	Description
1	Base
2	Emitter
3	Collector

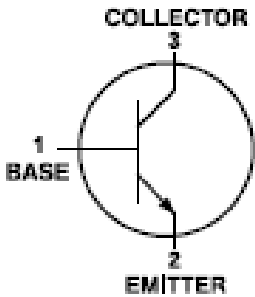

Marking Information

P/N	Package	Part Marking
GSTMMBT3904WF	SOT-323	1E

Ordering Information

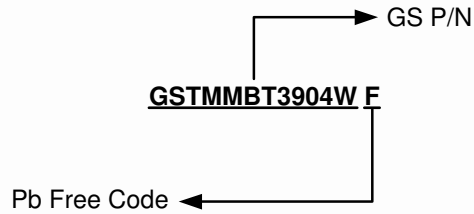

Part Number	Package	Quantity
GSTMMBT3904WF	SOT-323	3000 PCS

Absolute Maximum Ratings

$T_A=25^{\circ}\text{C}$

Symbol	Conditions	Typical	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	60	V
V_{EBO}	Emitter-Base Voltage	6.0	V
$I_{C(DC)}$	Collector Current (DC)	200	mA
P_D	Total Device Dissipation $T_A=25^{\circ}\text{C}$	200	mW
T_J	Junction Temperature Range	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Conditions	Min	Max	Unit
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0\text{mA}$, $I_B=0\text{mA}$)	40	-	V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu\text{A}$, $I_E=0\text{mA}$)	60	-	V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=10\mu\text{A}$, $I_C=0\text{mA}$)	6.0	-	V
I_{CEX}	Collector Cutoff Current ($V_{CE}=30\text{V}$, $V_{EB(off)}=3.0\text{V}$)	-	50	nA
I_{BL}	Base Cutoff Current ($V_{CE}=30\text{V}$, $V_{EB(off)}=3.0\text{V}$)	-	50	nA
h_{FE}	DC Current Gain ($I_C=0.1\text{mA}$, $V_{CE}=1.0\text{V}$)	40	-	-
	DC Current Gain ($I_C=1.0\text{mA}$, $V_{CE}=1.0\text{V}$)	70	-	-
	DC Current Gain ($I_C=10\text{mA}$, $V_{CE}=1.0\text{V}$)	100	300	-
	DC Current Gain ($I_C=50\text{mA}$, $V_{CE}=1.0\text{V}$)	60	-	-
	DC Current Gain ($I_C=100\text{mA}$, $V_{CE}=1.0\text{V}$)	30	-	-

Electrical Characteristics (Continue)

($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Conditions	Min	Max	Unit
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10\text{mA}$, $I_B=1.0\text{mA}$) ($I_C=50\text{mA}$, $I_B=5.0\text{mA}$)	- -	0.2 0.3	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10\text{mA}$, $I_B=1.0\text{mA}$) ($I_C=50\text{mA}$, $I_B=5.0\text{mA}$)	0.65 -	0.85 0.95	V
f_T	Current-Gain-Bandwidth Product ($I_C=10\text{mA}$, $V_{CE}=20\text{V}$, $f=100\text{MHz}$)	300	-	MHz
C_{obo}	Output Capacitance ($V_{CB}=5\text{V}$, $I_E=0\text{mA}$, $f=1.0\text{MHz}$)	-	4.0	pF
C_{ibo}	Input Capacitance ($V_{EB}=0.5\text{V}$, $I_C=0\text{mA}$, $f=1.0\text{MHz}$)	-	8.0	pF
h_{ie}	Input Impedance ($I_C=1.0\text{mA}$, $V_{CE}=10\text{V}$, $f=1.0\text{kHz}$)	1.0	10	$\text{K}\Omega$
h_{re}	Voltage Feedback Ratio ($I_C=1.0\text{mA}$, $V_{CE}=10\text{V}$, $f=1.0\text{kHz}$)	0.5	8.0	$\times 10^{-4}$
h_{fe}	Small-Signal Current Gain ($I_C=1.0\text{mA}$, $V_{CE}=10\text{V}$, $f=1.0\text{kHz}$)	100	400	-
h_{oe}	Output Admittance ($I_C=1.0\text{mA}$, $V_{CE}=10\text{V}$, $f=1.0\text{kHz}$)	1.0	40	umhos
NF	Noise Figure ($I_C=100\mu\text{A}$, $V_{CE}=5\text{V}$, $R_S=1.0\text{k}\Omega$, $f=1.0\text{kHz}$)	-	5.0	dB
t_d	Delay Time ($V_{CC}=3.0\text{V}$, $V_{BE(off)}=-0.5\text{V}$, $I_C=10\text{mA}$, $I_{B1}=1.0\text{mA}$)	-	35	ns
t_r	Rise Time ($V_{CC}=3.0\text{V}$, $V_{BE(off)}=-0.5\text{V}$, $I_C=10\text{mA}$, $I_{B1}=1.0\text{mA}$)	-	35	ns
t_s	Storage Time ($V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$)	-	200	ns
t_f	Fall Time ($V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$)	-	50	ns

Typical Application Circuit

DUTY CYCLE=2%

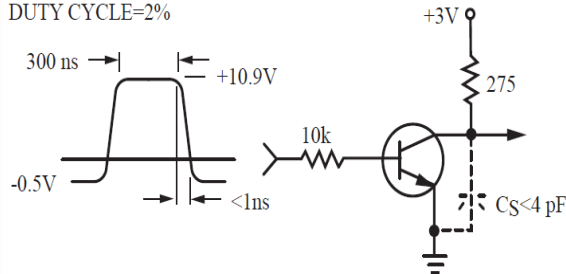


FIG.1 Delay and Rise Time
Equivalent Test Circuit

$10 < t_1 < 500\mu\text{s}$
DUTY CYCLE=2%







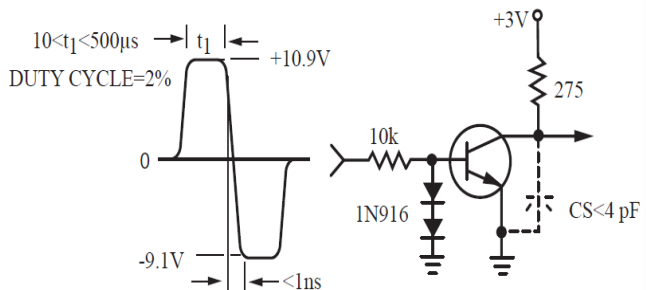


FIG.2 Storage and Fall Time
Equivalent Test Circuit

*Total shunt capacitance of test jig and connectors

Typical Performance Characteristics

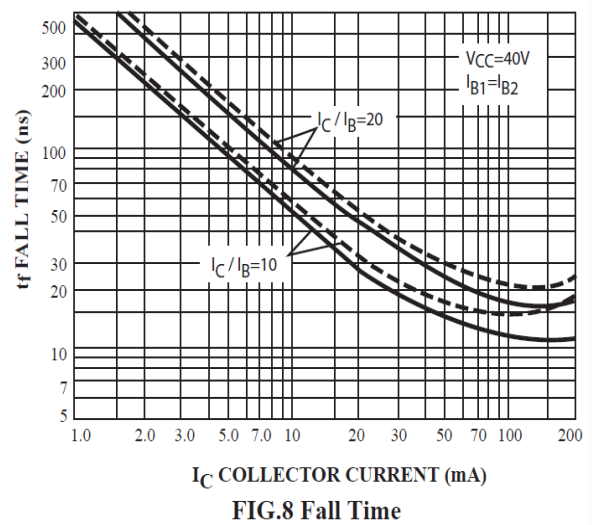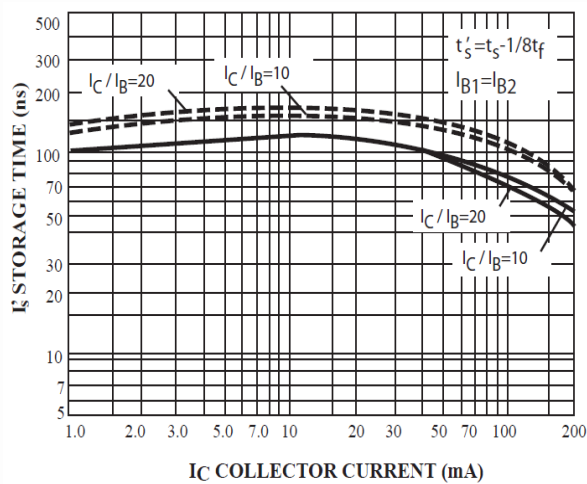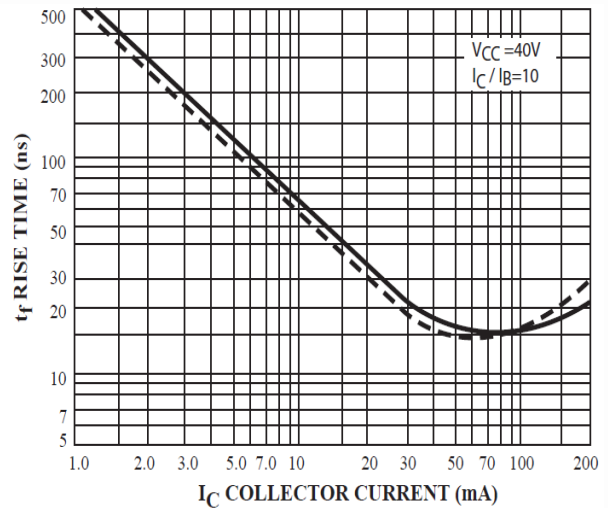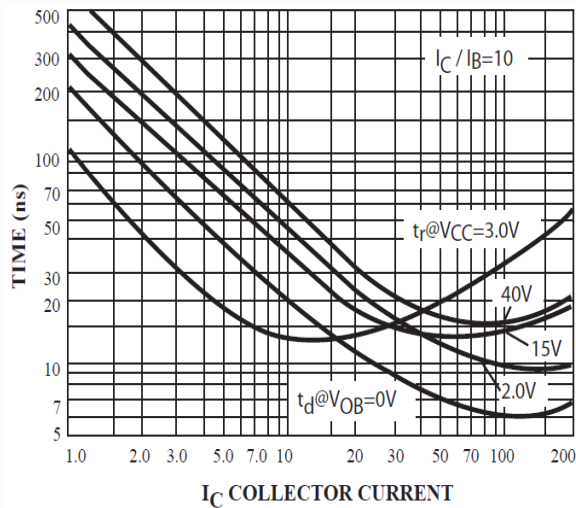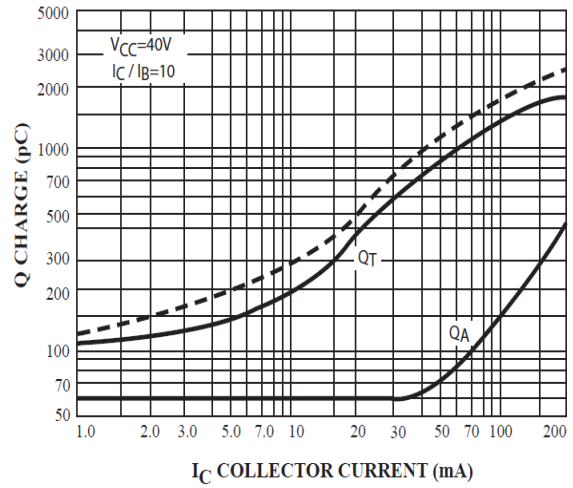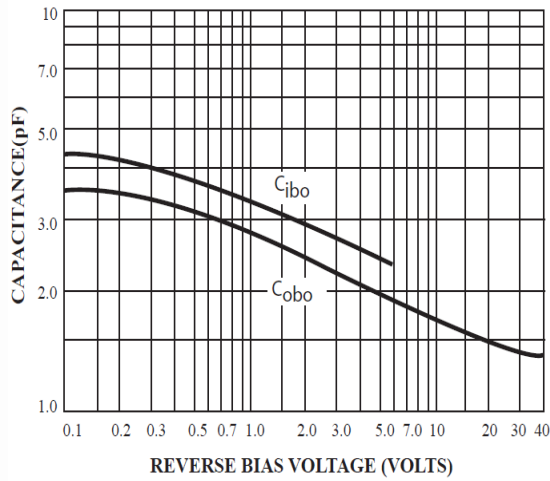

Typical Performance Characteristics (Continue)

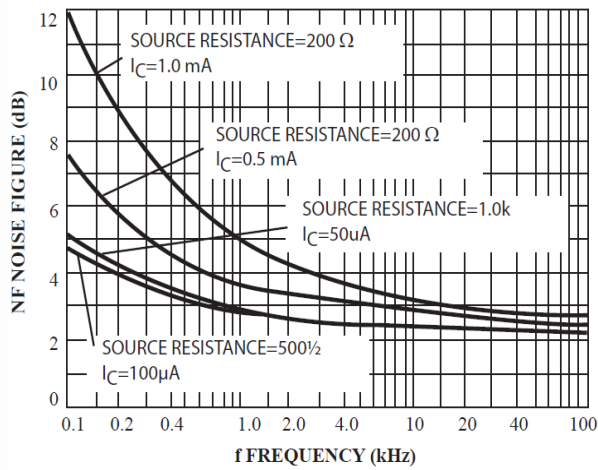


FIG.9

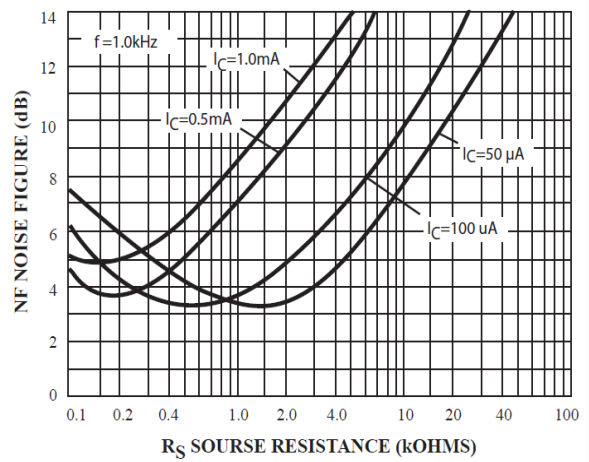


FIG.10

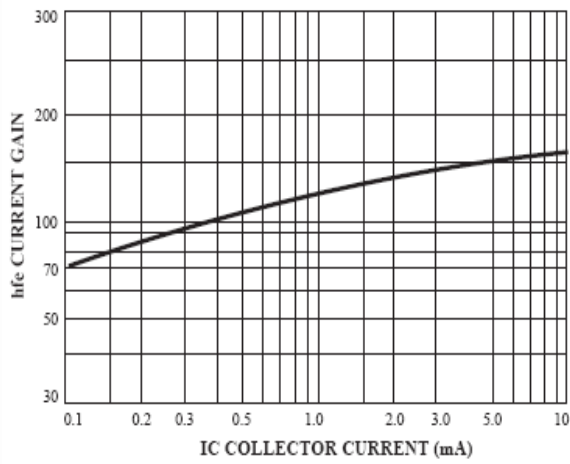


Figure 11. Current Gain

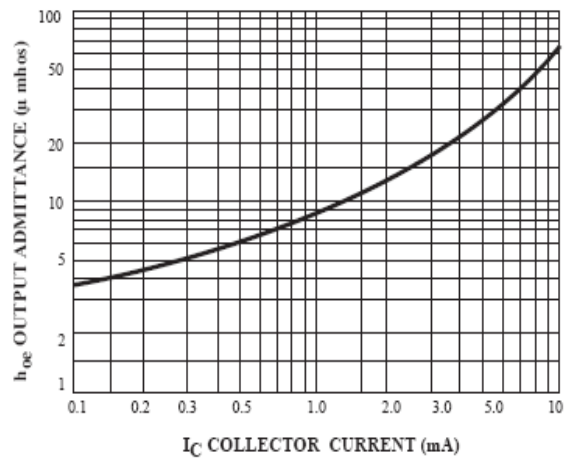


Figure 12. Output Admittance

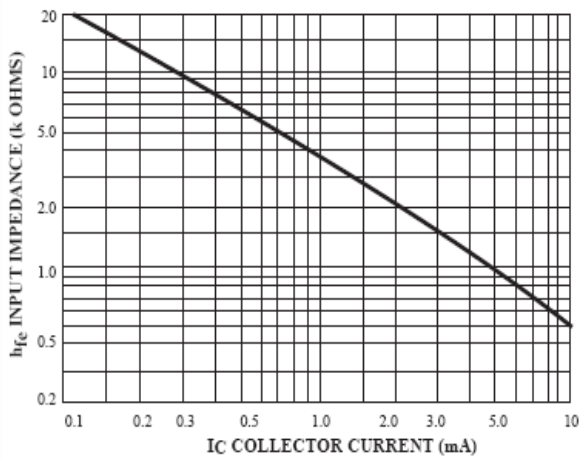


Figure 13. Input Impedance





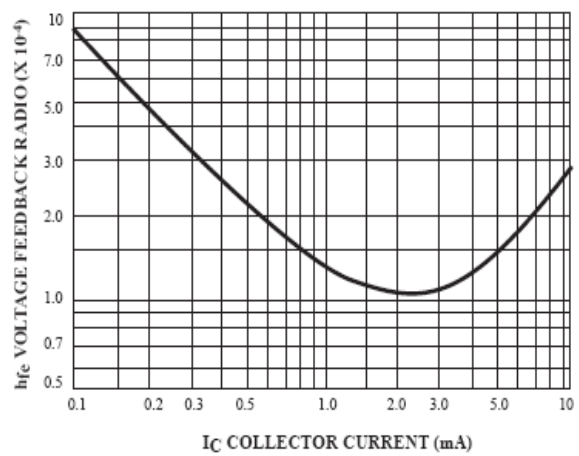


Figure 14. Voltage Feedback Ratio


Typical Performance Characteristics (Continue)

TYPICAL STATIC CHARACTERISTICS

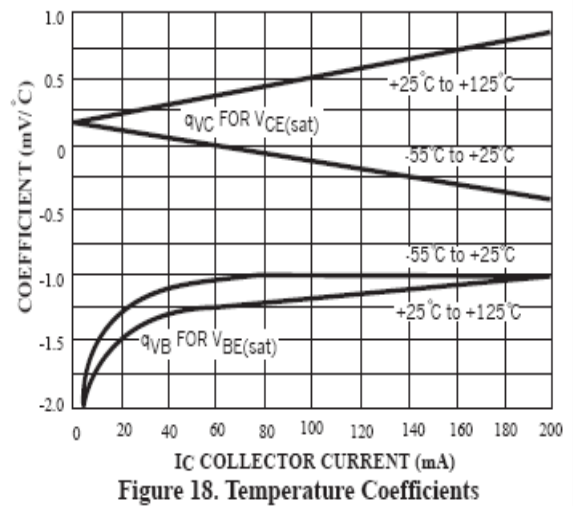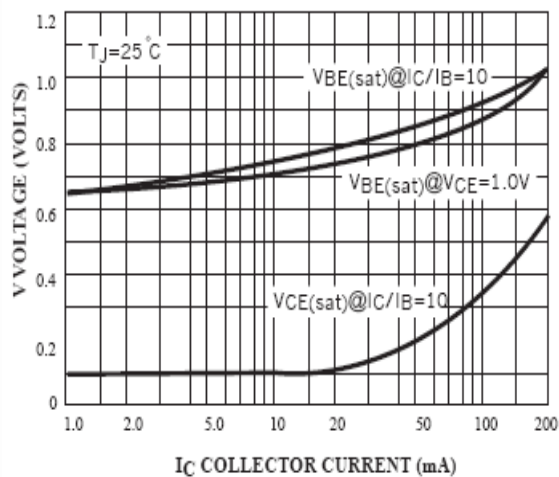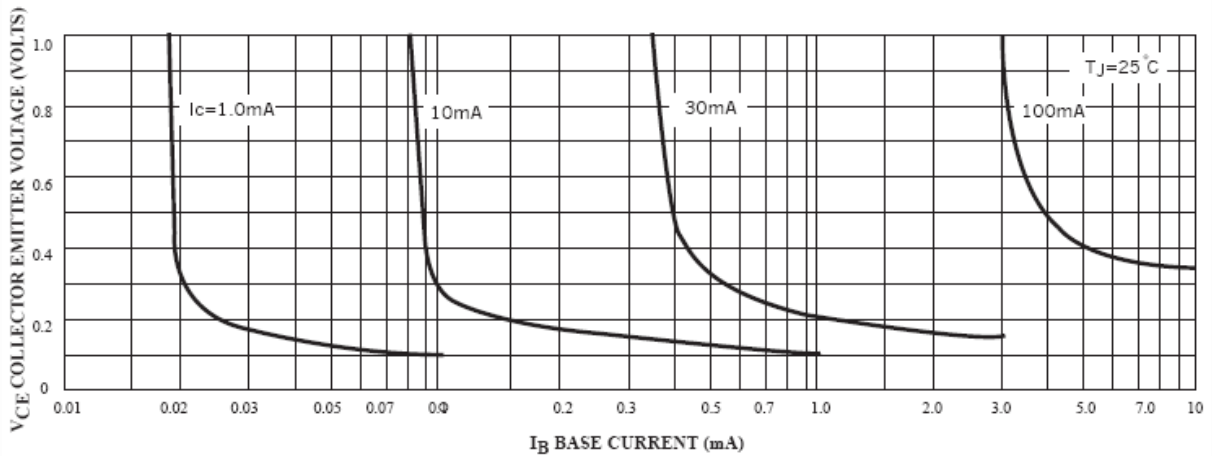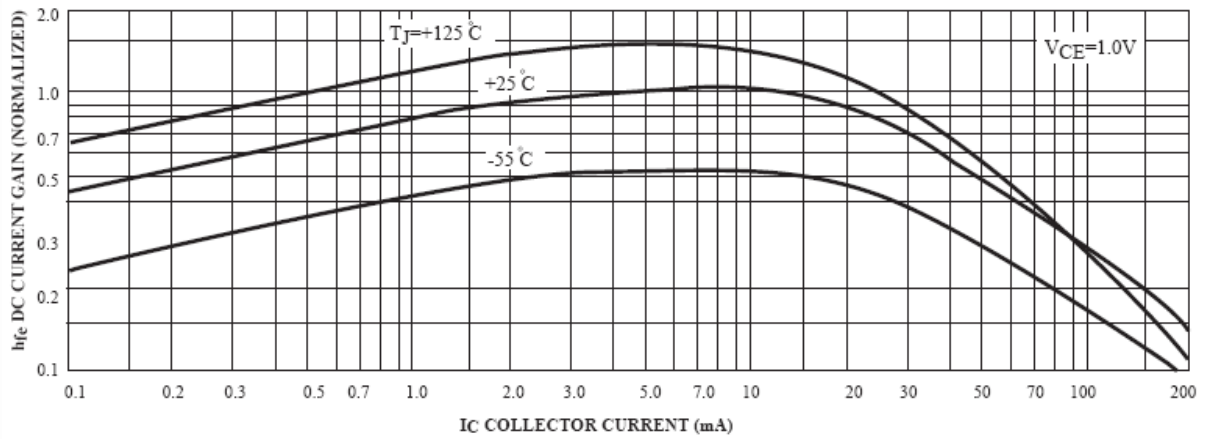

Package Dimension

SOT-323

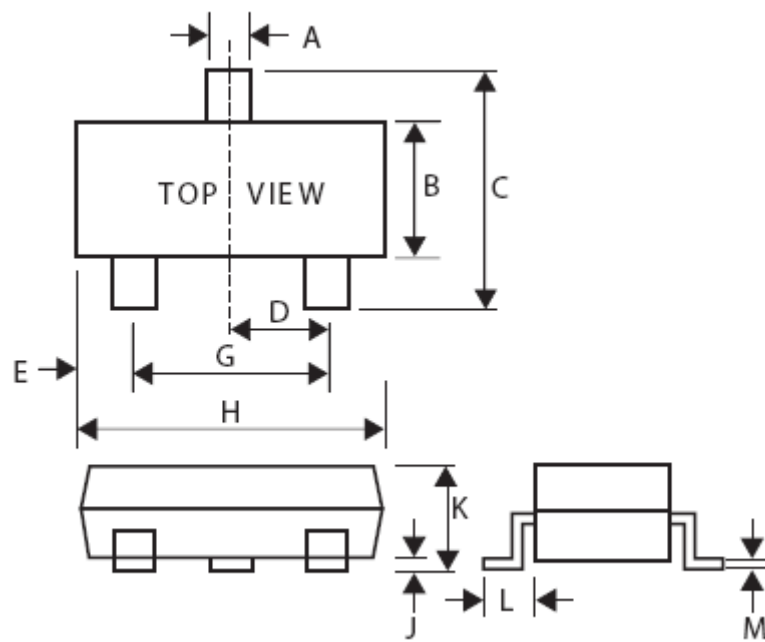







Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.30	0.40	0.012	0.016
B	1.15	1.35	0.045	0.053
C	2.00	2.40	0.079	0.094
D	-	0.65	-	0.026
E	0.30	0.40	0.012	0.016
G	1.20	1.40	0.047	0.055
H	1.80	2.20	0.071	0.087
J	0.00	0.10	0.000	0.004
K	0.80	1.00	0.032	0.039
L	0.42	0.53	0.017	0.021
M	0.10	0.25	0.004	0.010

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587