

GS1117A

1A Low Dropout Voltage Regulator

Product Description

The GS1117A is a low dropout three-terminal regulator with 1A output current capability. In order to obtain lower dropout voltage and fast transient response, which is critical for low voltage applications.

The GS1117A has been optimized. The device is available in an adjustable version and fixed output voltage of 1.2V, 1.5V, 1.8V, 2.5V, 3.3V and 5V. Dropout voltage is guaranteed at a maximum of 1.3V at 1A.

Current limit is trimmed to ensure specified output current and controlled short circuit current. On-chip thermal limiting provides protection against any combination of overload that would create excessive junction temperatures.

The GS1117A is available in the three leads SOT-89, SOT-223 and TO-252 surface mount packages.


Features

- Adjustable or Fixed Output
- Current Limit and Thermal Protection
- Low ESR MLCC at Input/ Output Capacitors
- Output Current of 1A
- 1.3V Dropout Voltage
- Line Regulation typically at 0.2% Max.
- Load Regulation typically at 0.4% Max.
- RoHS Compliant, 100%Pb & Halogen Free




Applications

- Battery-Power Circuitry
- Post Regulator for Switching Power Supply
- Low Voltage Logic Suppliers


Block Diagram

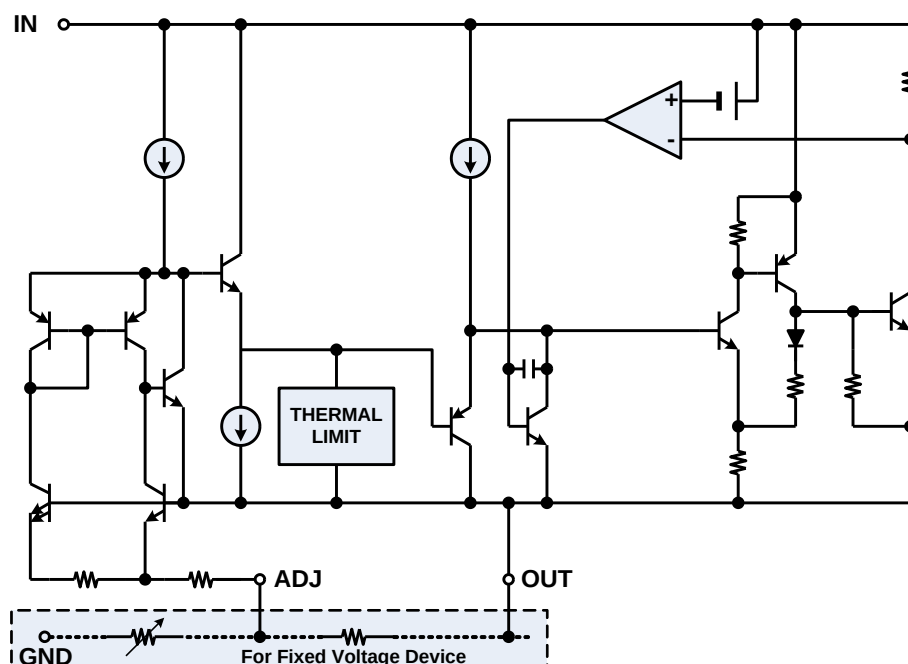

Packages & Pin Assignments

TO-252		SOT-223		SOT-89	
					
Pin	GS1117AD	Pin	GS1117AX	Pin	GS1117AY
1	GND/ADJ	1	GND/ADJ	1	GND/ADJ
2	V _{OUT}	2	V _{OUT}	2	V _{OUT}
3	V _{IN}	3	V _{IN}	3	V _{IN}

Ordering Information

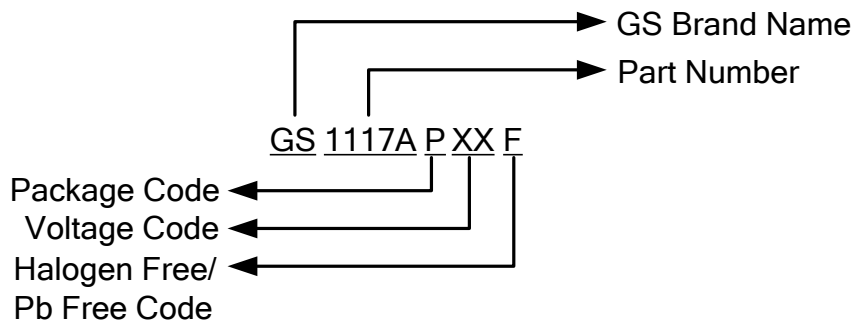

GS1117A			
TO-252	SOT-223	SOT-89	Output
GS1117ADF	GS1117AXF	GS1117AYF	ADJ
GS1117AD12F	GS1117AX12F	GS1117AY12F	1.2V
GS1117AD15F	GS1117AX15F	GS1117AY15F	1.5V
GS1117AD18F	GS1117AX18F	GS1117AY18F	1.8V
GS1117AD25F	GS1117AX25F	GS1117AY25F	2.5V
GS1117AD33F	GS1117AX33F	GS1117AY33F	3.3V
GS1117AD50F	GS1117AX50F	GS1117AY50F	5.0V


Note:

*GS1117AXF, X means package type and F means Lead Free part.

*For other voltages, please contact factory.

*Adjustable Version does not need Voltage Code.

Marking Information

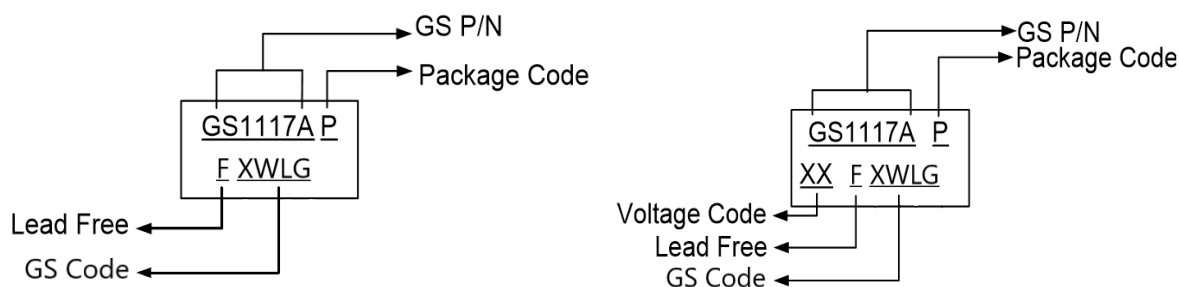

Absolute Maximum Ratings

Symbol	Parameter	Maximum		Unit
V_{IN}	Input Voltage	18		V
T_J	Junction Temperature	150		°C
T_{STG}	Storage temperature Range	-65 to 150		°C
T_{LEAD}	Lead Temperature (Soldering, 10 sec)	300		°C
θ_{JA}	Thermal Resistance Junction to Ambient	SOT-223 SOT-89 TO-252	135 175 68	°C/W
θ_{JC}	Thermal Resistance Junction to Case	SOT-223 SOT-89 TO-252	19 100 7.5	°C/W
P_D	Power Dissipation	SOT-223 SOT-89 TO-252	0.9 0.5 1.2	W

Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter Name	Min.	Max.	Unit
Input Voltage Range		15	V
Environment Temperature	-40	125	°C

Electrical Characteristics

$I_{OUT}=0mA$, and $T_J=+25\text{ }^{\circ}C$ unless otherwise specified.

Parameter	Device	Conditions	MIN	TYP	MAX	Unit
Reference Voltage (Note)	GS1117A-Adj	$V_{IN}=2.75V$, $I_{LOAD}=10mA$	1.238	1.250	1.262	V
		* $V_{IN}=2.7V$ to $12V$, $I_{LOAD}=10mA$ to $1A$	1.225	1.250	1.275	
Output Voltage	GS1117A-1.2	$V_{IN}=3.7V$	1.176	1.200	1.224	V
		* $V_{IN}=3.0V$, $I_{LOAD}=10mA$ to $1A$	1.140	1.200	1.248	V
	GS1117A-1.5	$V_{IN}=4.0V$	1.485	1.500	1.515	V
		* $V_{IN}=3.0V$, $I_{LOAD}=10mA$ to $1A$	1.476	1.500	1.524	V
	GS1117A-1.8	$V_{IN}=4.3V$	1.782	1.800	1.818	V
		* $V_{IN}=3.3V$, $I_{LOAD}=10mA$ to $1A$	1.771	1.800	1.829	V
	GS1117A-2.5	$V_{IN}=5.0V$	2.475	2.500	2.525	V
		* $V_{IN}=4.0V$, $I_{LOAD}=10mA$ to $1A$	2.460	2.500	2.540	V
	GS1117A-3.3	$V_{IN}=5.8V$	3.267	3.300	3.333	V
		* $V_{IN}=4.8V$, $I_{LOAD}=10mA$ to $1A$	3.247	3.300	3.353	V
Line Regulation (Note1)	GS1117A-1.2	* $I_{LOAD}=10mA$, $3.0V \leq V_{IN} \leq 12V$		10	15	mV
	All	* $I_{LOAD}=10mA$, ($1.5V+V_{OUT}$) $\leq V_{IN} \leq 12V$		0.04	0.2	%
Load Regulation (Note1)	GS1117A-1.2	$V_{IN}=3.0V$, $0 \leq I_{OUT} \leq 1A$		8	20	mV
	All	* $V_{IN}=V_{OUT}+1.5V$, $I_{LOAD}=10mA$ to $1A$		0.2	0.4	%
Minimum Load Current	GS1117A-Adj	* $V_{IN}=5V$, $V_{ADJ}=0V$		3	7	mA
Ground Pin Current	GS1117A-XX	* $V_{IN}=V_{OUT}+1.5V$, $I_{LOAD}=10mA$ to $1A$		7	13	mA
Adjust Pin Current	GS1117A-Adj	* $V_{IN}=2.65V$ to $12V$, $I_{LOAD}=10mA$		55	90	μA
Current Limit	All	* $V_{IN}-V_{OUT}=1.5V$	1			A
Ripple Rejection (Note 2)	All	$V_{IN}=V_{OUT}+1.5V$,	60	72		dB
Dropout Voltage (Note 1,3)	All	$I_{LOAD}=10mA$		1.00	1.15	V
		* $V_{IN} \geq 2.65V$, $I_{LOAD}=1A$		1.15	1.3	V
Temperature Coefficient	All	* $V_{IN}=V_{OUT}+1.5V$, $I_{LOAD}=10mA$		0.005		%/ $^{\circ}C$
OTP			130	150	170	$^{\circ}C$





The * denotes the specifications which apply over the full temperature range.

Note 1: Low duty pulse testing with Kelvin connections required.

Note 2: 120Hz input ripple (C_{ADJ} for ADJ=25 μF)

Note 3: ΔV_{OUT} , $\Delta V_{REF}=1\%$

Typical Performance Characteristics

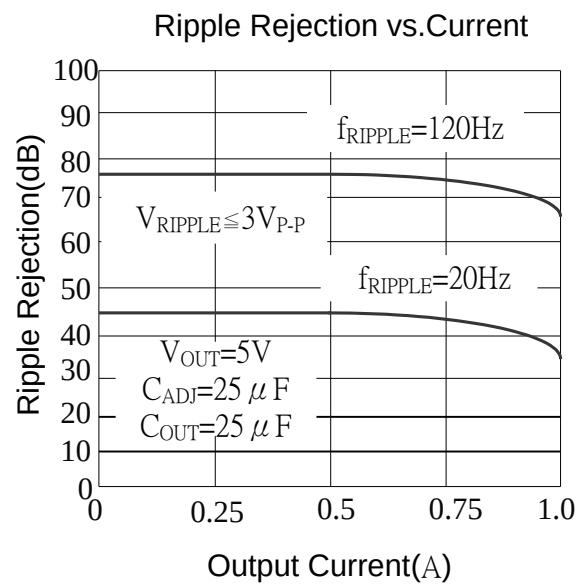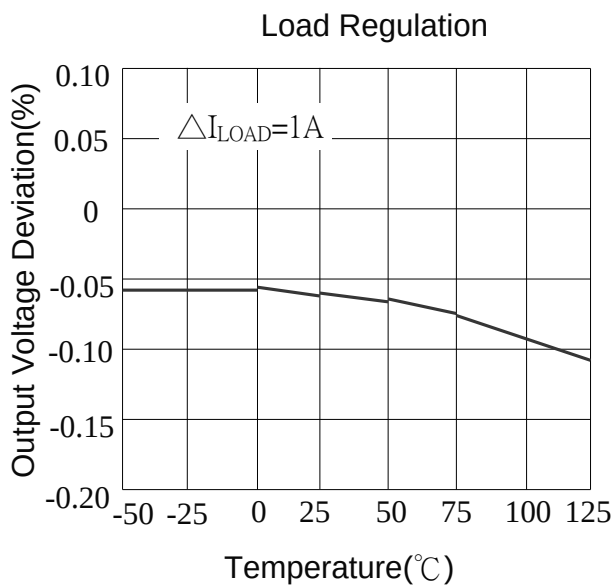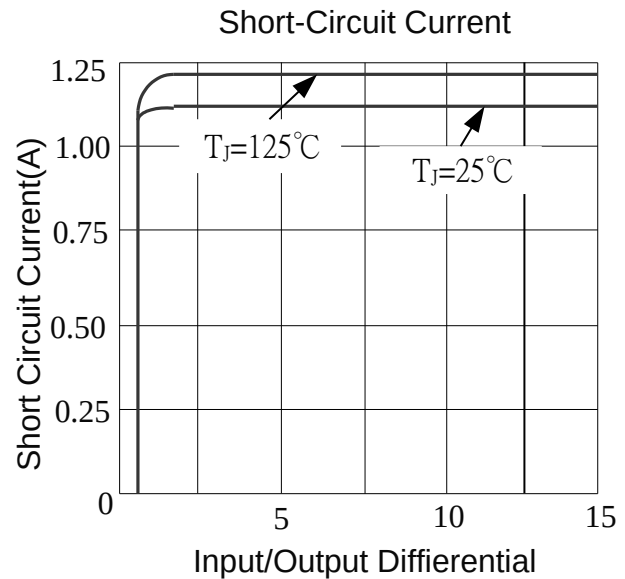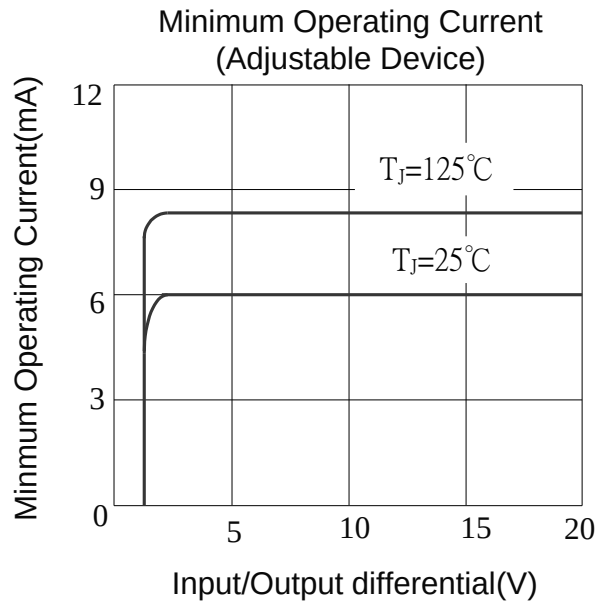

Typical Applications

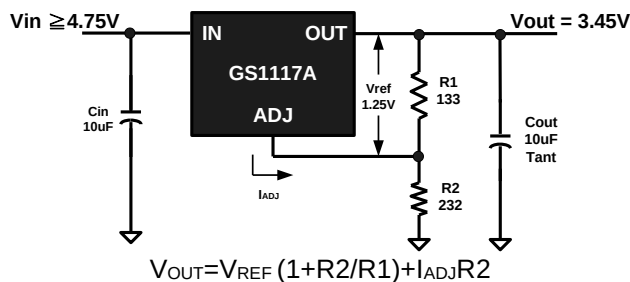


Figure 1. Adjustable Voltage Regulator

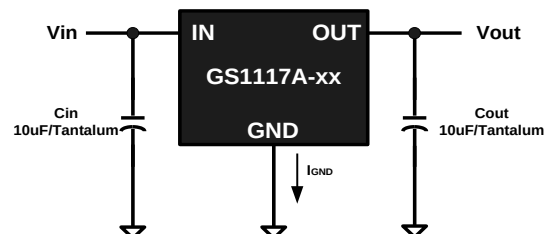


Figure 2. Fixed Voltage Regulator

Application Hints (Continues)

The ripple of the output Capacitors is a MLCC Test

condition: $V_{IN}=5V$, $V_{OUT}=3.3V$, $C_{IN}=1\mu F$ (Ceramic, X7R, 6.3V, 0603), CH1: V_{OUT} . CH4: I_{OUT}

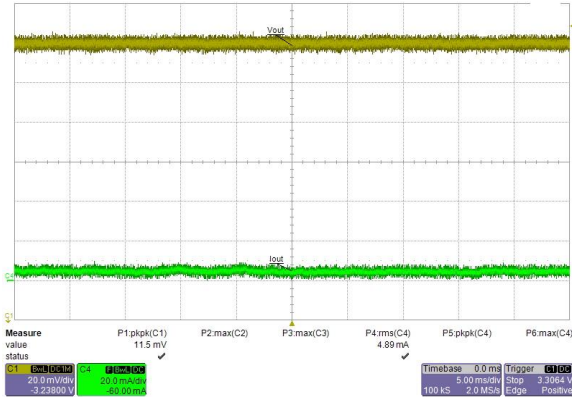


Fig 1. $I_{OUT} = 10mA$

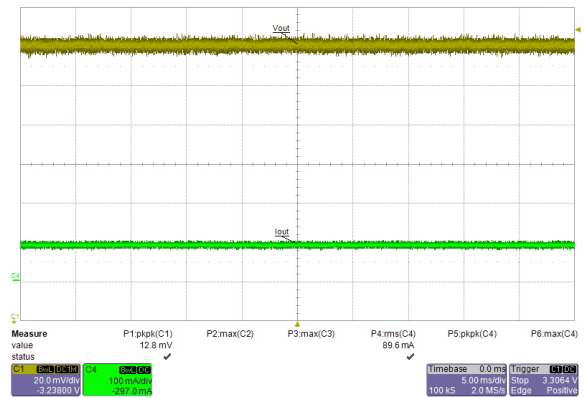


Fig 2. $I_{OUT} = 100mA$

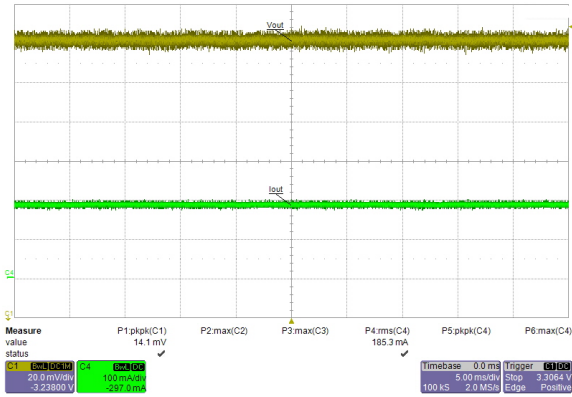


Fig 3. $I_{OUT} = 200mA$

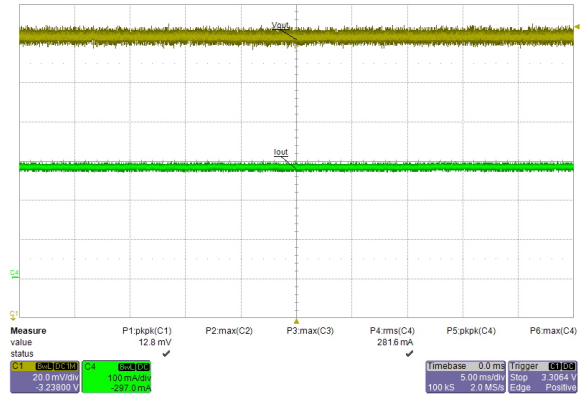


Fig 4. $I_{OUT} = 300mA$

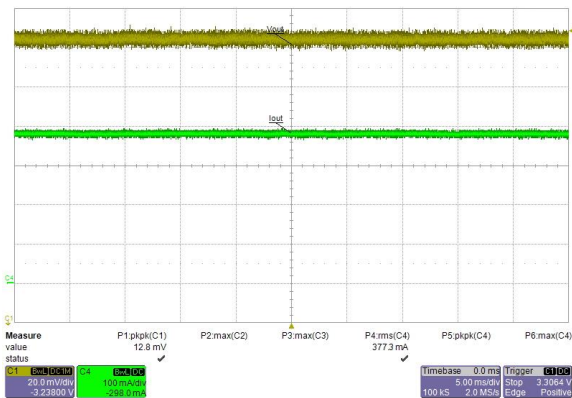


Fig 5. $I_{OUT} = 400mA$

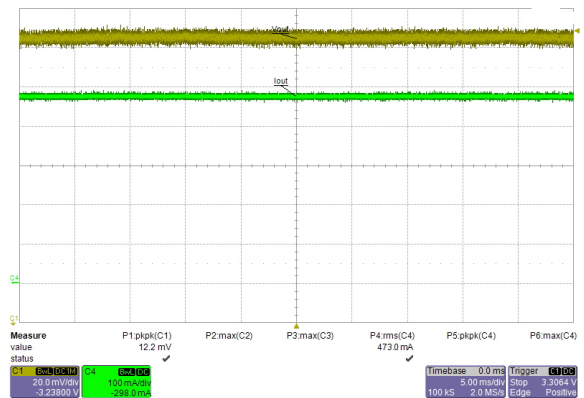


Fig 6. $I_{OUT} = 500mA$

Application Hints (Continues)

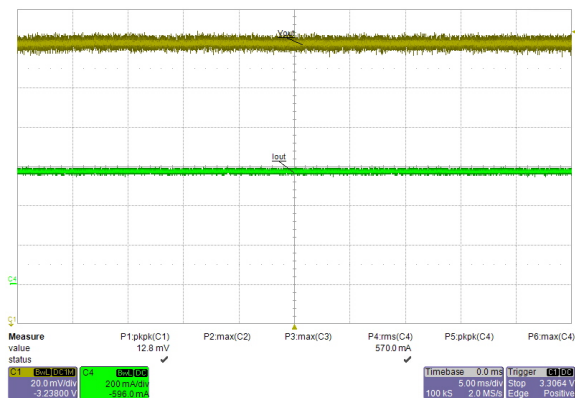


Fig 7. $I_{OUT} = 600\text{mA}$

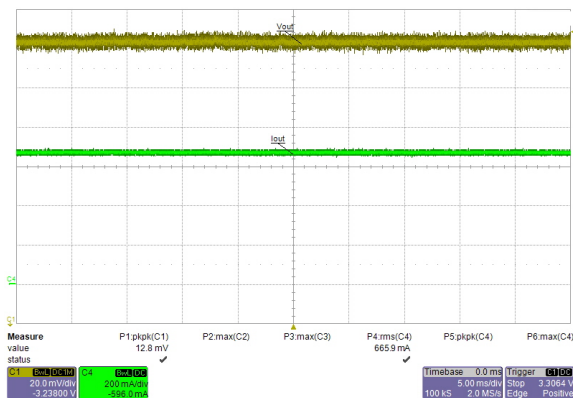


Fig 8. $I_{OUT} = 700\text{mA}$

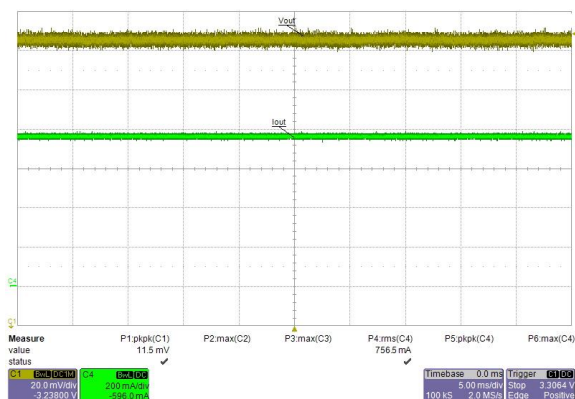


Fig 9. $I_{OUT} = 800\text{mA}$

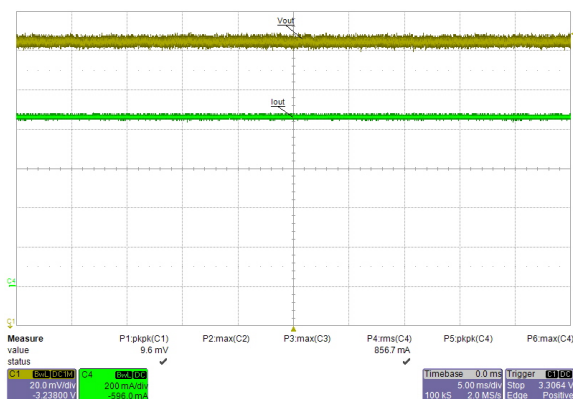


Fig 10. $I_{OUT} = 900\text{mA}$


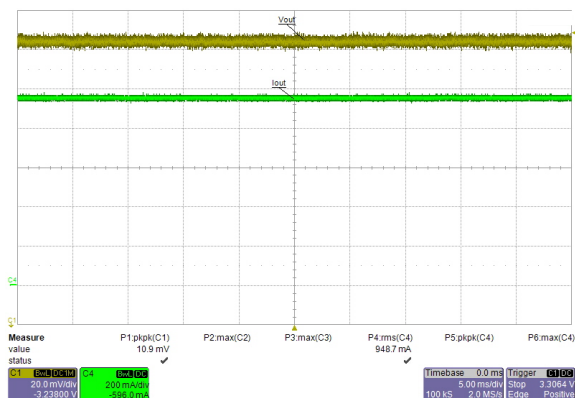


Fig 11. $I_{OUT} = 1\text{A}$

Package Dimension


TO-252

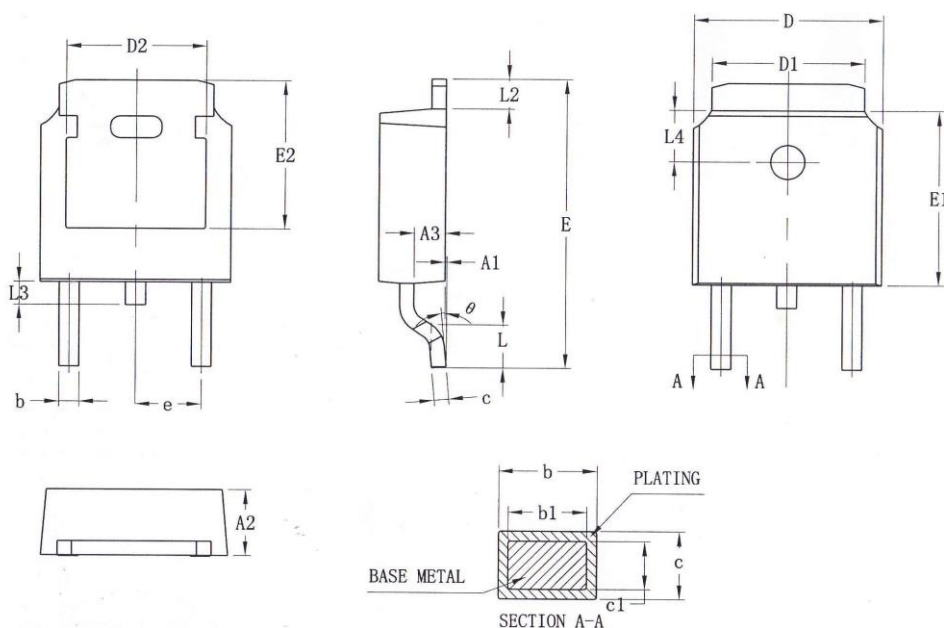

Dimensions

SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A1	0.00	0.10	-	0.004
A2	2.20	2.40	0.087	0.094
A3	1.02	1.12	0.040	0.044
b	0.74	0.82	0.029	0.032
b1	0.73	0.79	0.029	0.031
c	0.51	0.55	0.020	0.022
c1	0.50	0.52	0.020	0.020
D	6.50	6.70	0.256	0.264
D1	5.33REF		0.210REF	
D2	4.83REF		0.190REF	
E	9.90	10.30	0.390	0.406
E1	6.00	6.20	0.236	0.244
E2	5.30REF		0.209REF	
e	2.286BSC		0.090BSC	
L	1.40	1.60	0.055	0.063
L2	0.90	1.25	0.035	0.049
L3	0.60	1.00	0.024	0.039
L4	1.70	1.90	0.067	0.075
θ	0°	8°	0°	8°


SOT-223

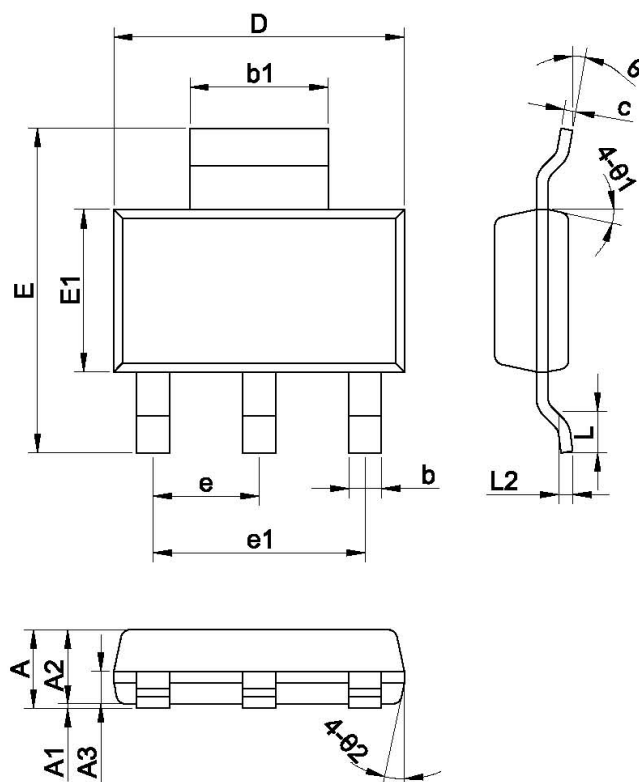

Dimensions

SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	1.55	1.80	0.061	0.071
A1	0.02	0.12	0.001	0.005
A2	1.45	1.75	0.057	0.069
A3	0.60	0.80	0.024	0.031
b	0.60	0.80	0.024	0.031
b1	2.90	3.10	0.114	0.122
c	0.24	0.32	0.009	0.013
D	6.20	6.50	0.244	0.256
E	6.70	7.30	0.264	0.287
E1	3.30	3.70	0.130	0.146
e	2.299REF		0.091REF	
e1	4.598REF		0.181REF	
L	0.90	-	.035	-
L2	0.30BSC		0.012BSC	
θ	0°	10°	0°	10°
θ1	10°	14°	10°	14°
θ2	10°	14°	10°	14°

SOT-89

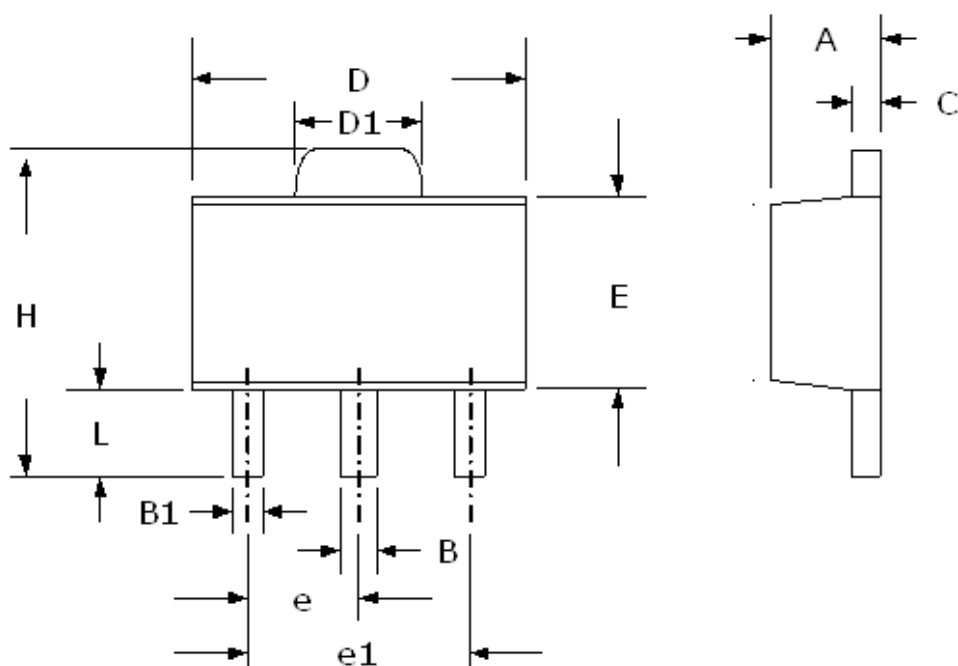

Dimensions

SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	1.40	1.60	0.055	0.063
B	0.38	0.58	0.015	0.023
B1	0.32	0.52	0.013	0.020
C	0.35	0.44	0.014	0.017
D	4.40	4.60	0.173	0.181
D1	1.55REF		0.061REF	
E	2.30	2.60	0.091	0.102
e	1.50TYP		0.059BSC	
e1	3.00TYP		0.118TYP	
H	3.94	4.25	0.155	0.167
L	0.90	1.20	0.035	0.047

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587