

GSM3660ETF

30V N-Channel Enhancement Mode MOSFET

Product Description

GSM3660E, N-Channel enhancement mode MOSFET, uses Advanced Trench Technology to provide excellent $R_{DS(ON)}$, low gate charge.

These devices are particularly suited for low voltage power management, such as smart phone and notebook computer, and low in-line power loss are needed in commercial industrial surface mount applications.


Features

- Low Gate Charge
- ESD Protected
- DFN1006-3L package design


Applications

- Power Management in Note book
- Portable Equipment
- Load Switch
- Switching circuits

Packages & Pin Assignments

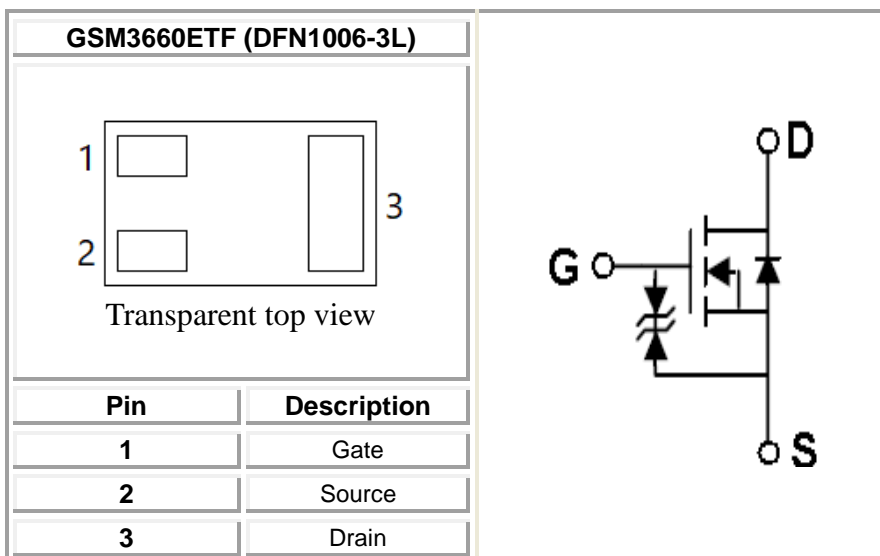


Ordering Information

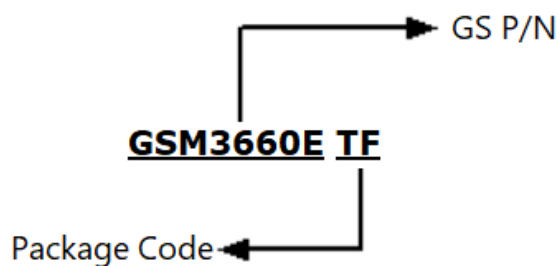

Part Number	Package	Quantity Reel
GSM3660ETF	DFN1006-3L	10000 PCS

Marking Information

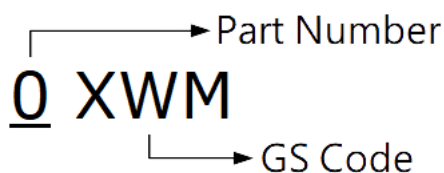

Absolute Maximum Ratings

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Typical	Unit
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 12	V
I_D	Continuous Drain Current ($T_A=25^{\circ}\text{C}$)	0.6	A
I_{DM}	Pulsed Drain Current	2.4	A
P_D	Power Dissipation	0.41	W
$R_{\theta JA}$	Thermal Resistance Junction to ambient	305	$^{\circ}\text{C}/\text{W}$
T_J	Operating Junction Temperature Range	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	30			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	0.5		1.5	
I_{GSS}	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 12V$			10	μA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=24V, V_{GS}=0V$			100	nA
		$V_{DS}=24V, V_{GS}=0V$ $T_J=85^\circ\text{C}$			30	μA
$R_{DS(on)}$	Drain-Source On-Resistance	$V_{GS}=10V, I_D=0.5A$		325	600	m Ω
		$V_{GS}=4.5V, I_D=0.4A$		400	650	
		$V_{GS}=2.5V, I_D=0.3A$		600	1200	
		$V_{GS}=1.8V, I_D=0.08A$		1250	1500	
g_{FS}	Forward Transconductance	$V_{DS}=10V, I_D=0.4A$		0.85		S
V_{SD}	Diode Forward Voltage	$I_S=0.5A, V_{GS}=0V$			1.35	V
Dynamic						
Q_g	Total Gate Charge	$V_{DS}=15V, V_{GS}=10V,$ $I_D=0.5A$		1.5		nC
Q_{gs}	Gate-Source Charge			0.2		
Q_{gd}	Gate-Drain Charge			0.2		
C_{iss}	Input Capacitance	$V_{DS}=15V, V_{GS}=0V$ $f=1\text{MHz}$		39		pF
C_{oss}	Output Capacitance			9		
C_{rss}	Reverse Transfer Capacitance			6		
$t_{d(on)}$	Turn-On Time	$V_{DD}=15V, I_D=0.5A,$ $V_{GS}=10V, R_G=2.5\Omega$		5.3		ns
t_r				16		
$t_{d(off)}$	Turn-Off Time			20		
t_f				18		

Typical Performance Characteristics

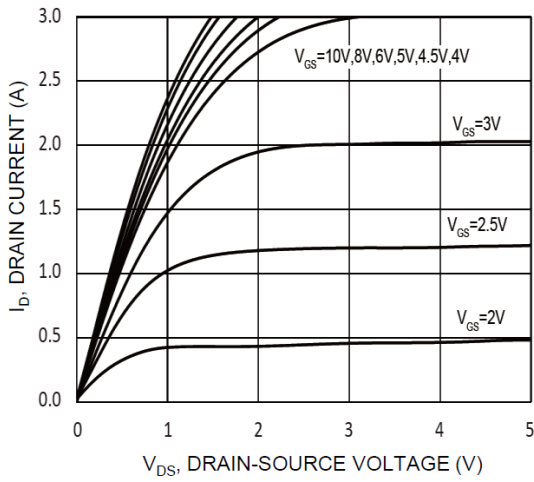


Fig. 1 Typical Output Characteristics

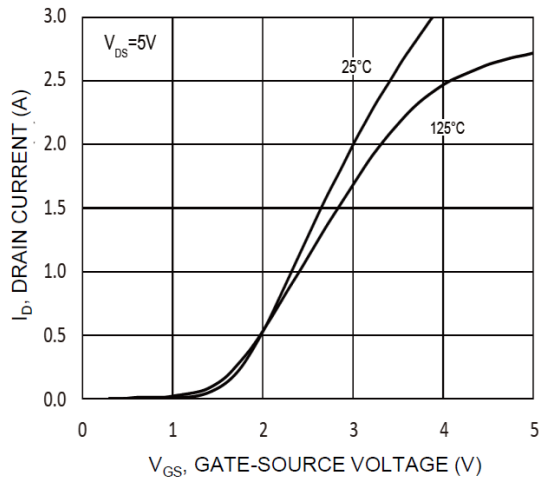


Fig. 2 Typical Transfer Characteristics

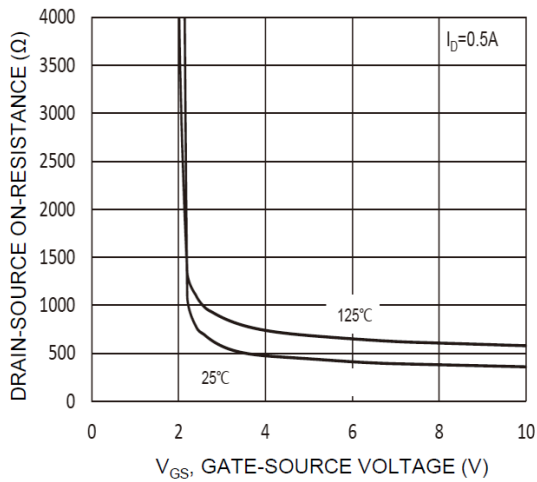


Fig. 3 Typical On-Resistance vs. V_{GS}

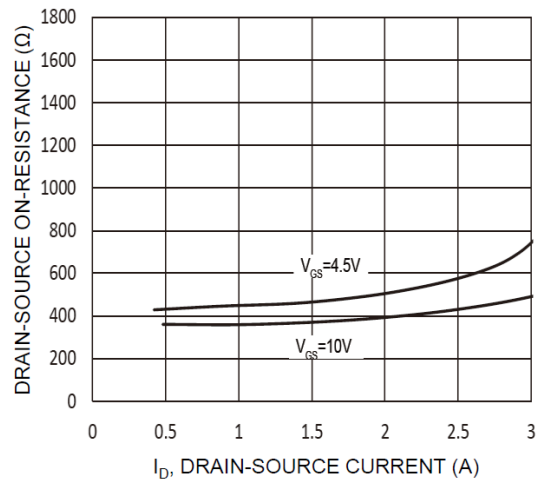


Fig. 4 Typical On-Resistance vs. I_D

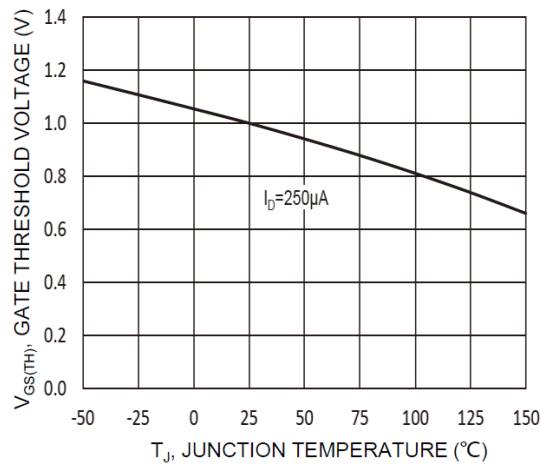


Fig. 5 Normalized Threshold Voltage

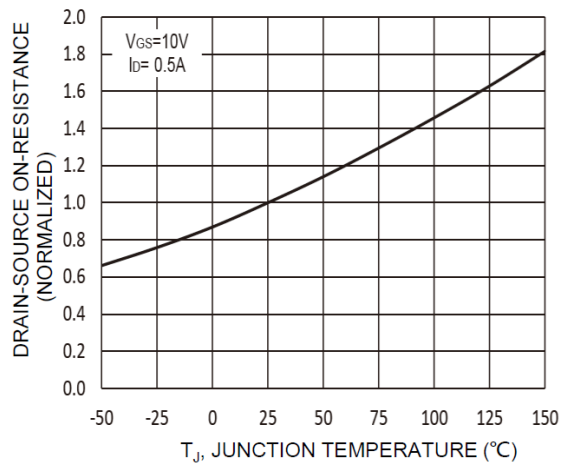


Fig. 6 On-Resistance Variation with T_J

Typical Performance Characteristics (Continue)

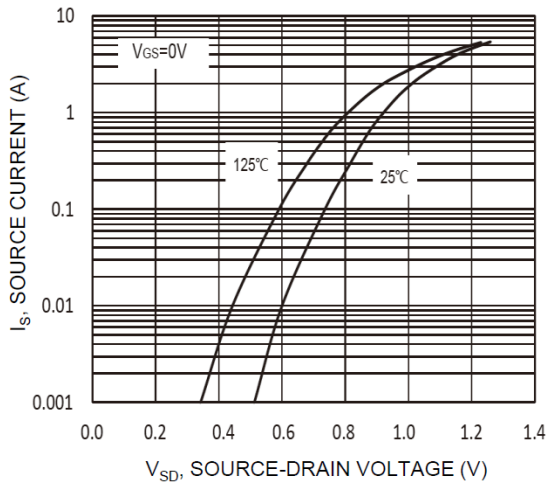


Fig. 7 Diode Forward Voltage vs. Current

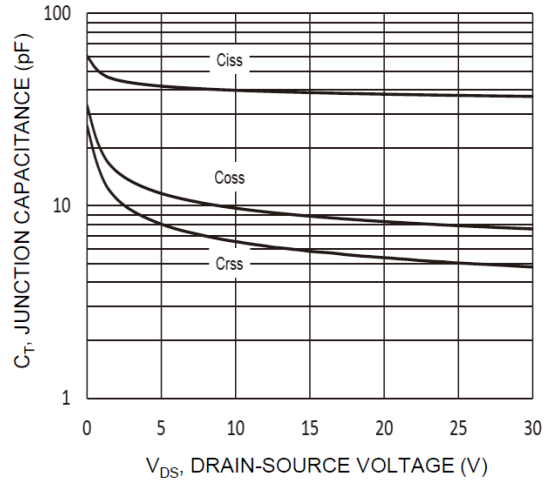


Fig. 8 Typical Capacitance

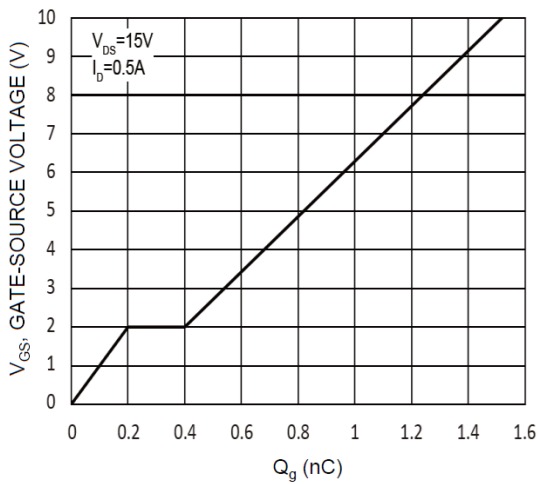


Fig. 9 Gate Charge

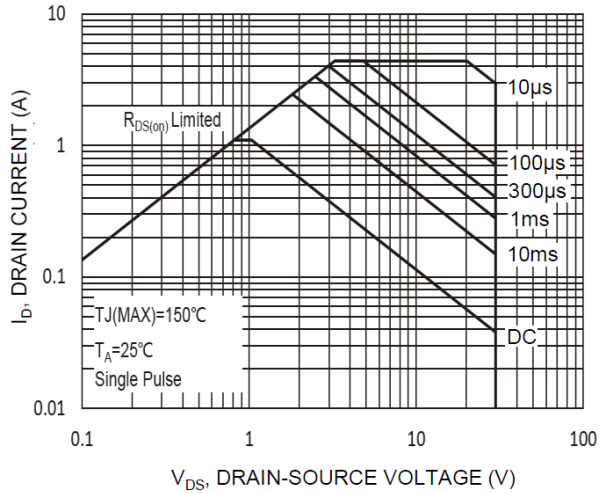


Fig. 10 Safe Operation Area


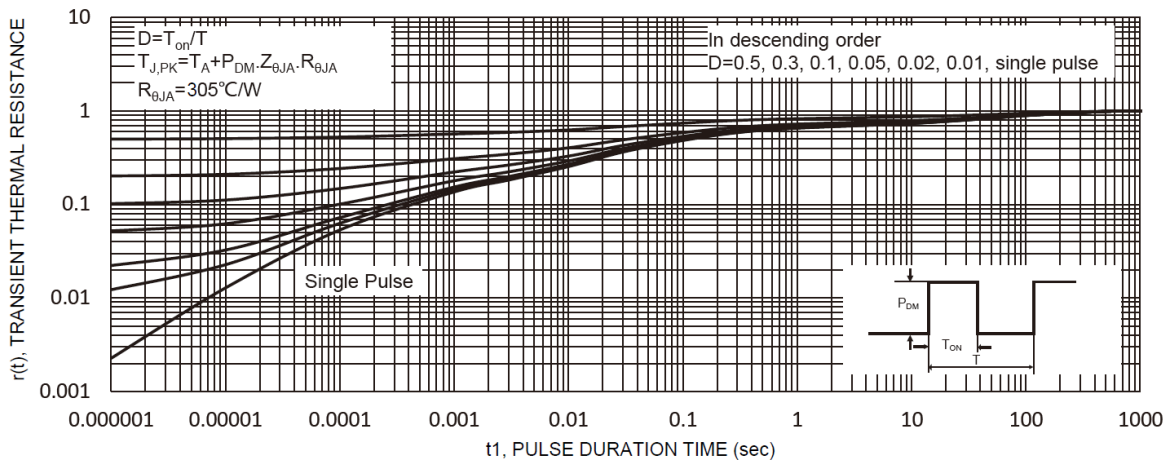


Fig. 11 Transient Thermal Response

Package Dimension

DFN1006-3L



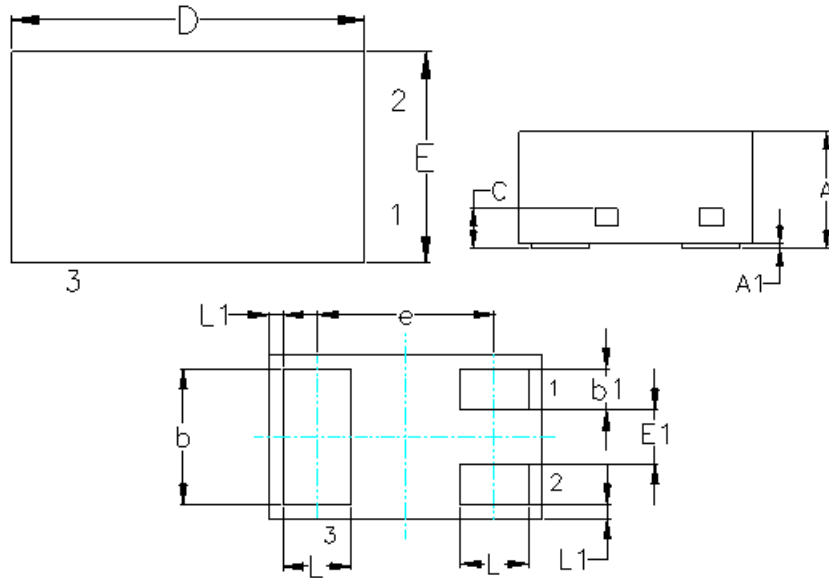



Dimensions



SYMBOL	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	0.450	0.550	0.018	0.022
A1	0.000	0.050	0.000	0.002
b	0.450	0.550	0.018	0.022
b1	0.100	0.200	0.004	0.008
C	0.120	0.180	0.005	0.007
D	0.950	1.050	0.037	0.041
E	0.550	0.650	0.022	0.026
E1	0.150	0.250	0.006	0.010
e	0.650 BSC		0.026 BSC	
L	0.200	0.300	0.008	0.012
L1	0.050 REF		0.002 REF	

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587