

GSMDS02N15

150V N-Channel MOSFETs

Product Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

These devices are well suited for high efficiency fast switching applications.


Features


- 150V, 1.2A, $R_{DS(ON)}=480m\Omega@V_{GS}=10V$
- Improved dv/dt capability
- Fast switching
- 100% EAS guaranteed

Applications


- Networking
- Load Switch
- LED applications

Packages & Pin Assignments

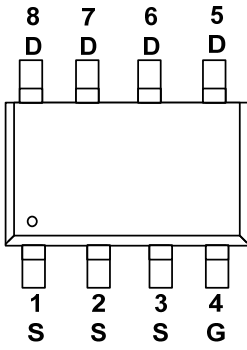GSMDS02N15SF (SOP-8)	
 <p>Top View</p>	
Pin	Description
1	Source
2	Source
3	Source
4	Gate
5	Drain
6	Drain
7	Drain
8	Drain

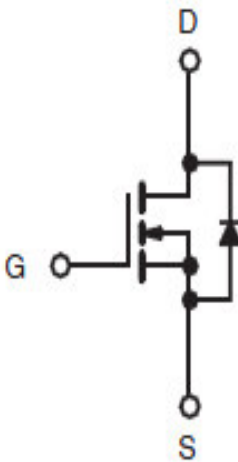


Ordering Information

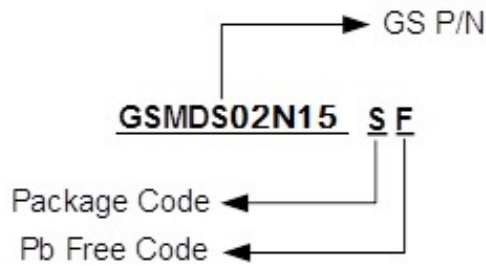

Part Number	Package	Quantity Reel
GSMD502N15SF	SOP-8	4000 PCS

Marking Information

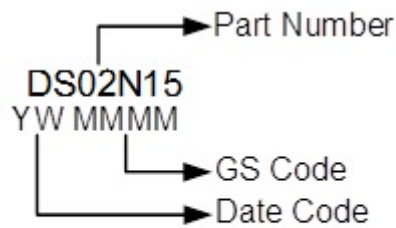

Absolute Maximum Ratings

$T_A=25^\circ\text{C}$ Unless otherwise noted

Symbol	Parameter	Typical	Unit
V_{DS}	Drain-Source Voltage	150	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current	$T_A=25^\circ\text{C}$	1.2
		$T_A=100^\circ\text{C}$	0.75
I_{DM}	Pulsed Drain Current	4.8	A
P_D	Power Dissipation ($T_A=25^\circ\text{C}$)	1.56	W
	Power Dissipation (Derate above 25°C)	0.012	W/ $^\circ\text{C}$
T_J	Operating Junction Temperature Range	-50 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-50 to +150	$^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	80	$^\circ\text{C}/\text{W}$

Electrical Characteristics

T_A=25°C Unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	150	---	---	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	2	3	4	V
I _{GSS}	Gate Source Leakage Current	V _{DS} =0V, V _{GS} =±20V	---	---	±100	nA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =150V, V _{GS} =0V	---	---	1	μA
		V _{DS} =120V, V _{GS} =0V, T _J =125°C	---	---	10	
I _S	Continuous Source Current	V _G =V _D =0V, Force Current			1.2	A
I _{SM}	Pulsed Source Current				2.4	
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =10V, I _D =1A	---	380	480	mΩ
		V _{GS} =6V, I _D =0.5A	---	410	520	
g _{FS}	Forward Transconductance	V _{DS} =10V, I _D =1A	---	1.7	---	S
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _S =1A, T _J =25°C	---	---	1	V
Dynamic						
Q _g	Total Gate Charge	V _{DS} =75V, V _{GS} =10V, I _D =1A		8.1	16	nC
Q _{GS}	Gate-Source Charge			2	4	
Q _{GD}	Gate-Drain Charge			2.7	5.4	
C _{iss}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, F=1MHz		350	700	pF
C _{oss}	Output Capacitance			34	68	
C _{rss}	Reverse Transfer Capacitance			26	52	
t _{d(on)}	Turn-On Time	V _{DD} =75V, I _D =1A, V _{GS} =10V, R _G =10Ω		8.2	16	ns
t _r				5.8	12	
t _{d(off)}	Turn-Off Time			14.8	28	
t _f				8	16	
R _g	Gate Resistance		V _{DS} =0V, V _{GS} =0V, F=1MHz	---	2	

Typical Performance Characteristics

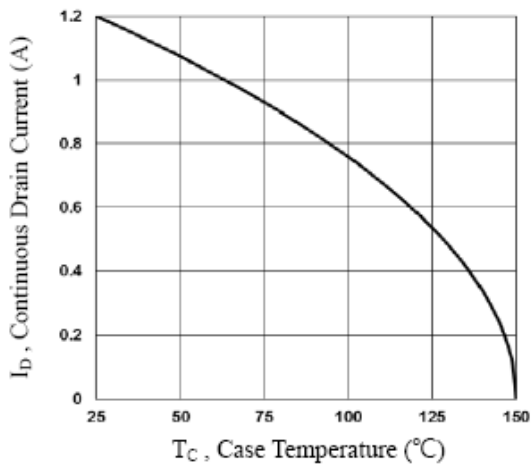


Fig.1 Continuous Drain Current vs. T_C

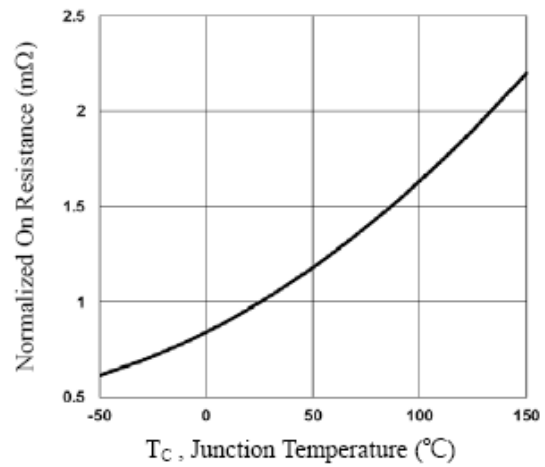


Fig.2 Continuous Drain Current vs. T_C

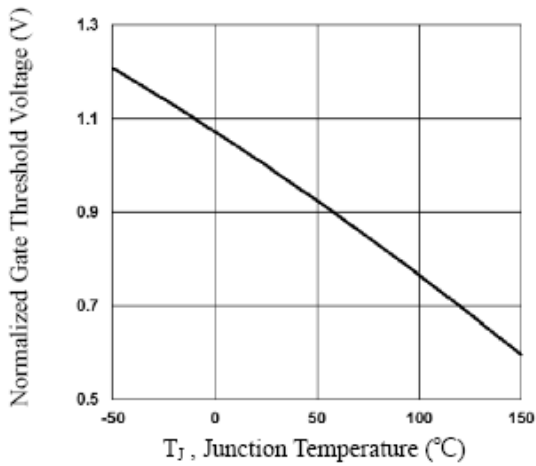


Fig.3 Normalized V_{th} vs. T_J

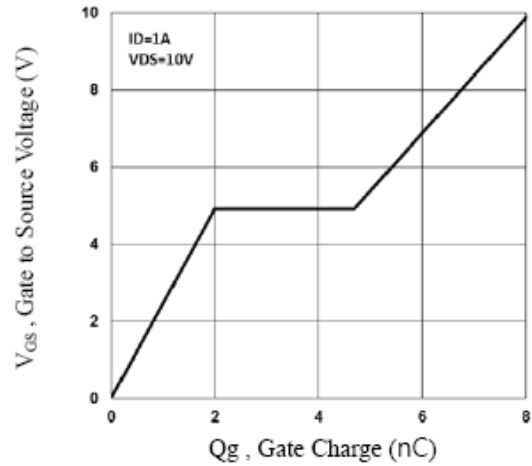


Fig.4 Gate Charge Waveform

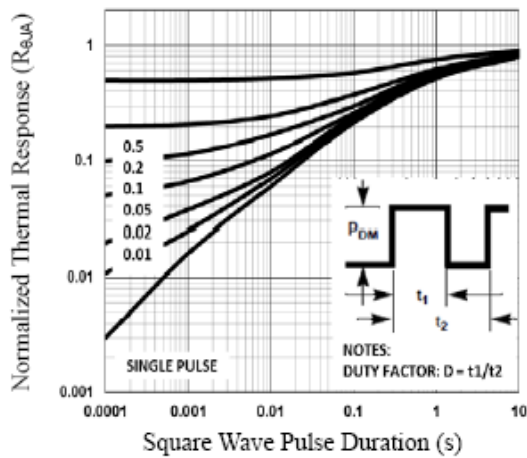


Fig.5 Normalized Transient Impedance

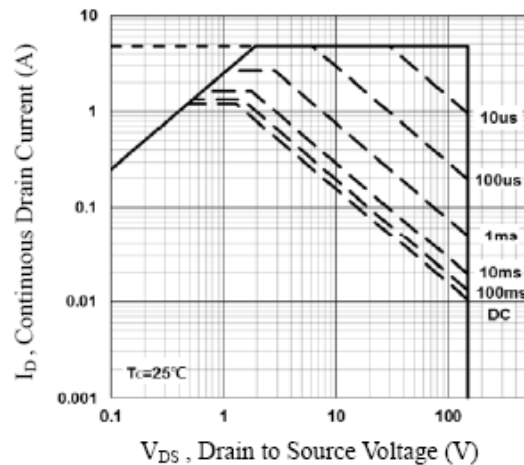


Fig.6 Maximum Safe Operation Area

Typical Performance Characteristics (Continue)

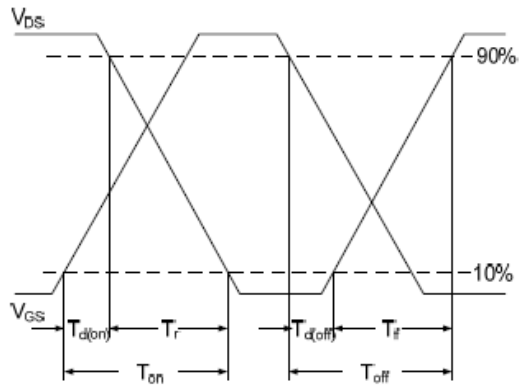


Fig.7 Switching Time Waveform





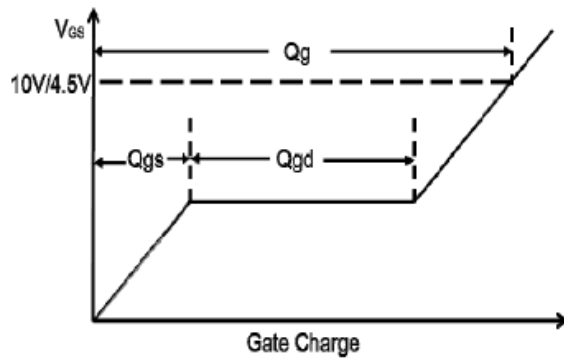


Fig.8 Gate Charge Waveform

Resistive Switching Test Circuit & Waveforms

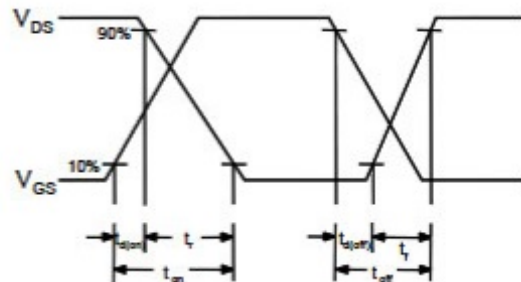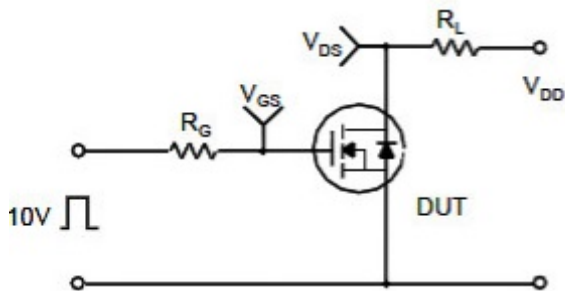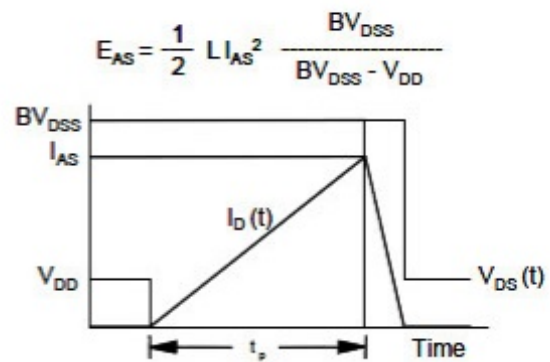


Unclamped Inductive Switching Test Circuit & Waveforms

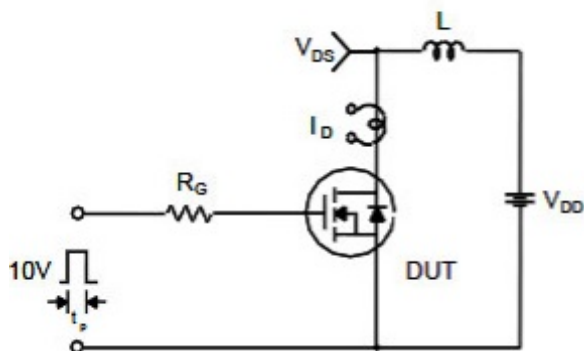

Package Dimension

SOP-8 PACKAGE INFORMATION

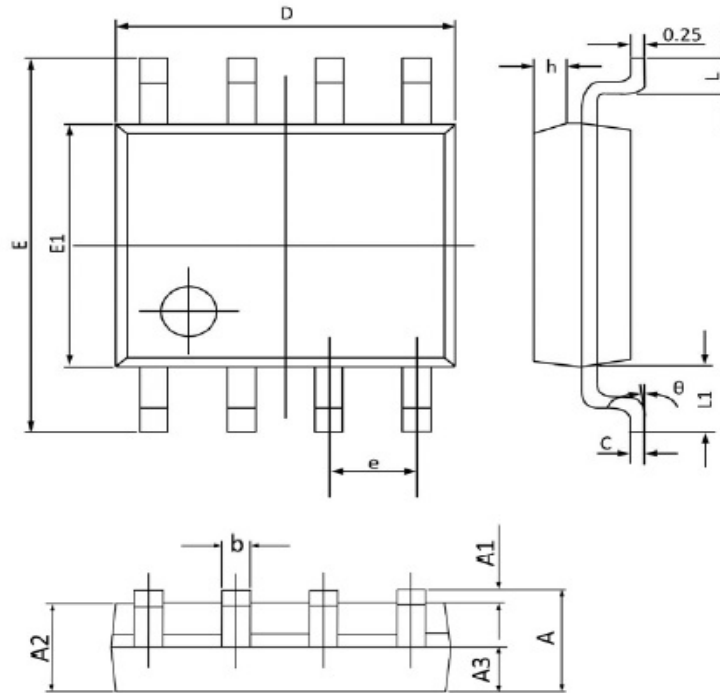







Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.068
A1	0.100	0.250	0.004	0.009
A2	1.300	1.500	0.052	0.059
A3	0.600	0.700	0.024	0.027
b	0.390	0.480	0.016	0.018
c	0.210	0.260	0.009	0.010
D	4.700	5.100	0.186	0.200
E	5.800	6.200	0.229	0.244
E1	3.700	4.100	0.146	0.161
e	1.270 (BSC)		0.050 (BSC)	
h	0.250	0.500	0.010	0.019
L	0.500	0.800	0.019	0.031
L1	1.050 (BSC)		0.041 (BSC)	
θ	0°	8°	0°	8°

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587