

GSTMMDT5401J4F

PNP General Purpose Transistor

Product Description

This device is designed as a general-purpose amplifier and switch.



Features

- Collector-Emitter Voltage $V_{CE} = -150V$
- Collector Current $I_C = -200mA$

Mechanical Data

- SOT-363 package design
- Epoxy meets UL 94 V-0 Flammability Rating
- RoHS Compliant and Halogen Free

Packages & Pin Assignments

SOT-363			Equivalent Circuit		
 Top View					
Pin	Symbol	Description	Pin	Symbol	Description
1	E1	Emitter 1	4	E2	Emitter 2
2	B1	Base 1	5	B2	Base 2
3	C2	Collector 2	6	C1	Collector 1

Ordering and Marking Information

Ordering Information			
Part Number	Package	Marking Code	Quantity/Reel
GSTMMDT5401J4F	SOT-363	K4M	3,000 PCS
GSTMMDT5401 ¹ ² - Product Code: GSTMMDT5401 - Package Code: ¹ is J4 for SOT-363 - Green Level: F for RoHS Compliant and Halogen Free			
Marking Information			
K4M - Product Code: K4M			

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CEO}	Collector-Emitter Voltage	-150	V
V _{CBO}	Collector-Base Voltage	-160	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current	-200	mA
P _D	Power Dissipation T _A =25°C ¹	200	mW
R _{θJA}	Thermal Resistance, Junction to Ambient ¹	625	°C/W
T _J	Junction Temperature Range	150	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

NOTE:

1. The device mounted on minimum recommended pad layout 1oz weight copper that is on a single-sided FR-4 PCB.

Electrical Characteristics (T_A=25°C unless otherwise specified)

Symbol	Description	Conditions	Min	Max	Unit
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C =-100μA, I _E =0	-160	-	V
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C =-1mA, I _B =0	-150	-	V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E =-10μA, I _C =0	-5	-	V
I _{CBO}	Collector Cut-Off Current	V _{CB} =-120V, I _E =0	-	-50	nA
I _{EBO}	Emitter Cut-Off Current	V _{EB} =-3V, I _C =0	-	-50	nA
h _{FE}	DC Current Gain	V _{CE} =-5V, I _C =-1mA	50	-	
		V _{CE} =-5V, I _C =-10mA	100	300	
		V _{CE} =-5V, I _C =-50mA	50	-	
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =-10mA, I _B =-1mA	-	-0.2	V
		I _C =-50mA, I _B =-5mA	-	-0.5	
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C =-10mA, I _B =-1mA	-	-1	V
		I _C =-50mA, I _B =-5mA	-	-1	
f _T	Transition Frequency	V _{CE} =-10V, I _C =-10mA f= 100MHz	100	300	MHz
C _{ob}	Output Capacitance	V _{CB} =-5V, I _E =0, f=1MHz	-	4.5	pF
N _F	Noise Figure	V _{CE} =-10V, I _C =-0.1mA, f=1KHz, R _S =1KΩ	-	6	dB
t _d	Delay time	V _{CC} =-3V, I _C =-10mA, V _{BE} =-0.5V I _{B1} =-I _{B2} =-1mA	-	35	nS
t _r	Rise time		-	35	nS
t _s	Storage time		-	225	nS
t _f	Fall time	V _{CC} =-3V, I _C =-10mA, I _{B1} =-I _{B2} =- 1mA	-	75	nS

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

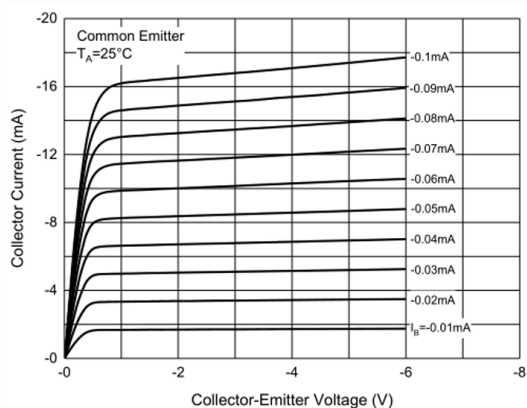


Figure 1. Static Characteristic

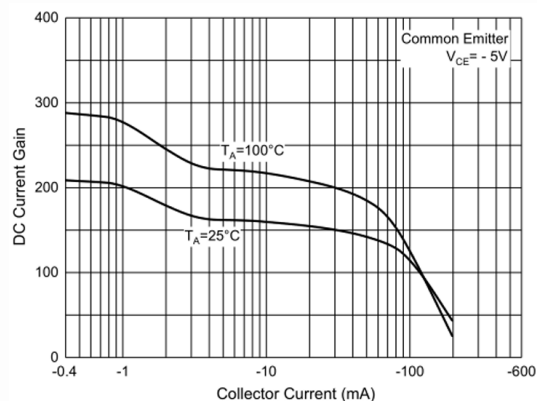


Figure 2. DC Current Gain Characteristics

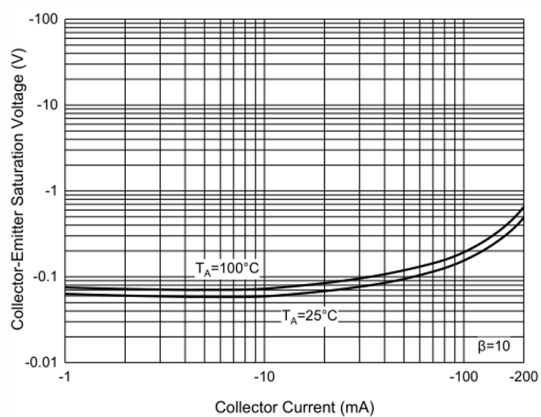


Figure 3. Collector-Emitter Saturation Voltage Characteristics

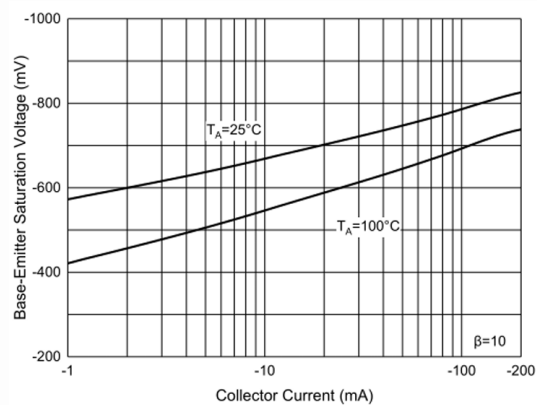


Figure 4. Base-Emitter Saturation Voltage Characteristics

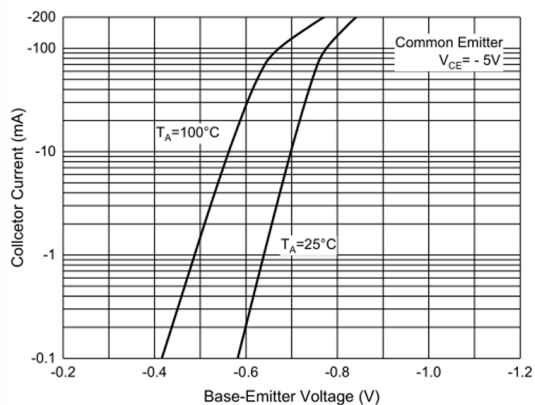


Figure 5. Base-Emitter Voltage Characteristics


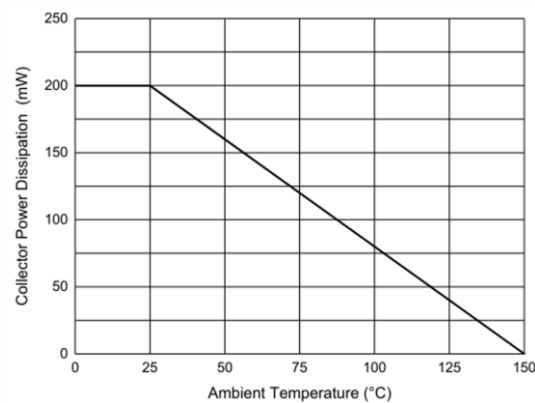



Figure 6. Power Derating Curve

SOT-363

Package Dimension

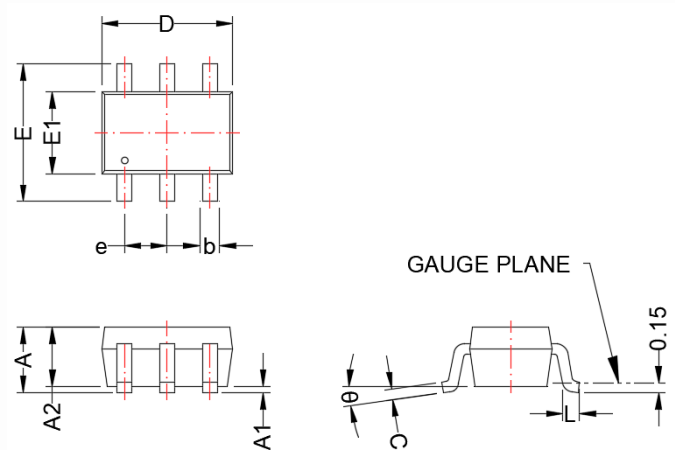

Recommended Land Pattern



Unit:mm

Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.80	1.10	0.031	0.043
A1	0.00	0.10	0.000	0.004
A2	0.70	1.00	0.028	0.039
b	0.15	0.35	0.006	0.014
c	0.08	0.25	0.003	0.010
D	1.80	2.20	0.071	0.087
E	1.80	2.40	0.071	0.094
E1	1.15	1.35	0.045	0.053
e	0.65 BSC		0.026 BSC	
L	0.26	0.46	0.010	0.018
θ	0°	8°	0°	8°

NOTE:

Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

NOTICE

- Globaltech Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Globaltech Semiconductor products described or contained herein. Globaltech Semiconductor products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Globaltech Semiconductor makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F, NO.43-1, Lane 11, Sec. 6, Minquan E. Rd Neihu District, Taipei City 114761, Taiwan (R.O.C).
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587