

GSM25N15X

150V N-Channel MOSFETs

Product Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

These devices are well suited for high efficiency fast switching applications.

Features

- 150V, 25A, $R_{DS(ON)}=51\text{m}\Omega@V_{GS}=10\text{V}$
- Improved dv/dt capability
- Fast switching
- 100% EAS guaranteed
- Green Device Available


Applications

- Motor Drive
- Power Tools
- LED Lighting

Packages & Pin Assignments


GSM25N15XFF (DFN5X6-8L)	
<p style="text-align: center;">Bottom View</p>	
Pin	Description
1	Source
2	Source
3	Source
4	Gate
5	Drain
6	Drain
7	Drain
8	Drain

Ordering Information

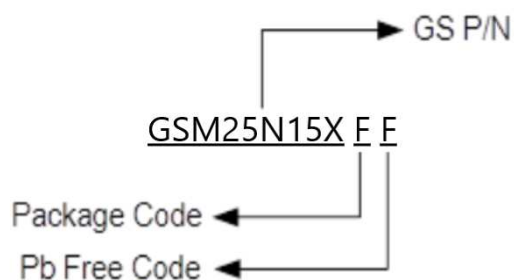

Part Number	Package	Quantity Reel
GSM25N15XFF	DFN5X6-8L	3000 PCS

Marking Information

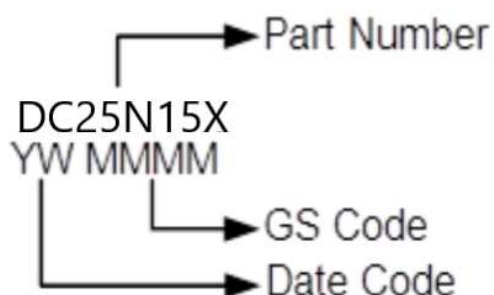

Absolute Maximum Ratings

$T_C=25^\circ\text{C}$ Unless otherwise noted

Symbol	Parameter	Typical	Unit
V_{DS}	Drain-Source Voltage	150	V
V_{GS}	Gate –Source Voltage	± 20	V
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	25
		$T_C=100^\circ\text{C}$	16
I_{DM}	Pulsed Drain Current ¹	100	A
EAS	Single Pulse Avalanche Energy ²	33	mJ
IAS	Single Pulse Avalanche Current ²	26	A
P_D	Power Dissipation ($T_C=25^\circ\text{C}$)	101	W
	Power Dissipation (Derate above 25°C)	0.81	W/ $^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	62	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance-Junction to Case	1.23	$^\circ\text{C}/\text{W}$

Electrical Characteristics

T_J=25°C Unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	150			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2	3	4	V
I _{GSS}	Gate-Source Leakage Current	V _{DS} =0V, V _{GS} =±20V			±100	nA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =120V, V _{GS} =0V			1	uA
		V _{DS} =120V, V _{GS} =0V, T _J =125°C			10	
I _S	Continuous Source Current	V _G =V _D =0V, Force Current			25	A
I _{SM}	Pulsed Source Current				50	
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =10V, I _D =20A		43	51	mΩ
g _{FS}	Forward Transconductance	V _{DS} =10V, I _D =3A		12		S
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _S =1A			1	V
t _{rr}	Reverse Recovery Time	V _R =100V, I _S =10A		95		ns
Q _{rr}	Reverse Recovery Charge	di/dt=100A/us		370		nc
Dynamic						
Q _g	Total Gate Charge ^{3,4}	V _{DS} =80V, V _{GS} =10V, I _D =15A		15	23	nC
Q _{gs}	Gate-Source Charge ^{3,4}			3.4	5	
Q _{gd}	Gate-Drain Charge ^{3,4}			5.4	8	
C _{iss}	Input Capacitance	V _{DS} =80V, V _{GS} =0V, f=1MHz		1080	1620	pF
C _{oss}	Output Capacitance			80	120	
C _{rss}	Reverse Transfer Capacitance			5.5	10	
t _{d(on)}	Turn-On Time ^{3,4}	V _{DD} =80V, I _D =15A, V _{GS} =10V, R _G =6Ω		4.6	7	ns
t _r				15	23	
t _{d(off)}	Turn-Off Time ^{3,4}			27	41	
t _f				8	12	
R _g	Gate Resistance		V _{DS} =0V, V _{GS} =0V, f=1MHz		0.8	

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. V_{DD}=50V, L=0.1mH, I_{AS}=26A., R_G=25Ω, Starting T_J=25°C .
3. The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%.
4. Essentially independent of operating temperature.

Typical Performance Characteristics

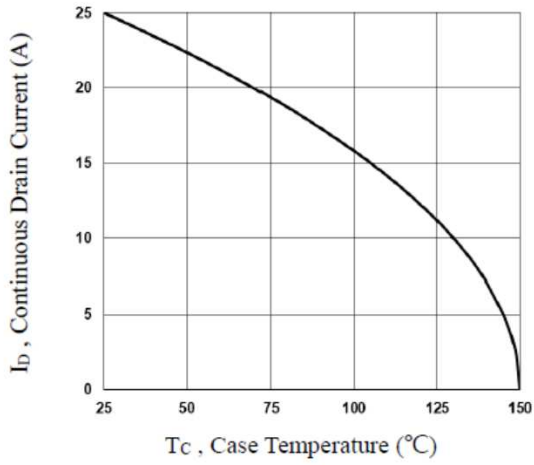


Fig.1 Continuous Drain Current vs. T_c

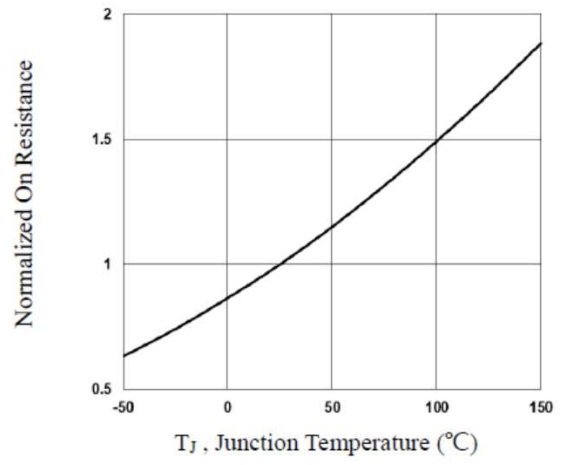


Fig.2 Normalized $R_{DS(on)}$ vs. T_j

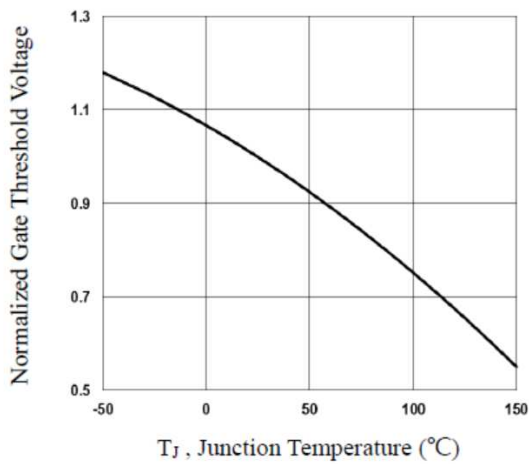


Fig.3 Normalized V_{th} vs. T_j

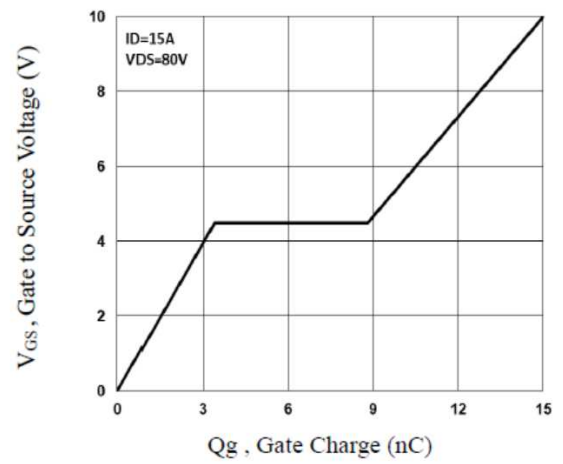


Fig.4 Gate Charge Characteristics

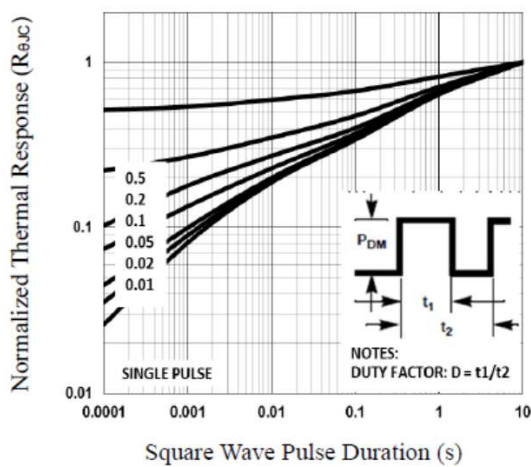


Fig.5 Normalized Transient Impedance

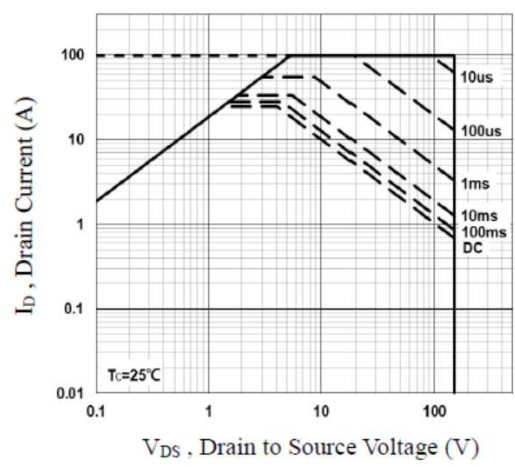


Fig.6 Maximum Safe Operation Area

Typical Performance Characteristics (Continue)

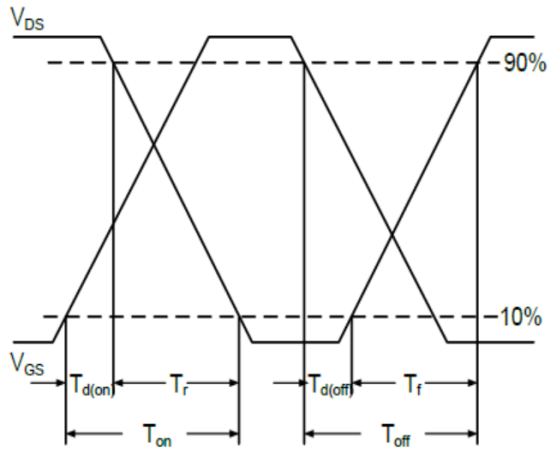


Fig.7 Switching Time Waveform


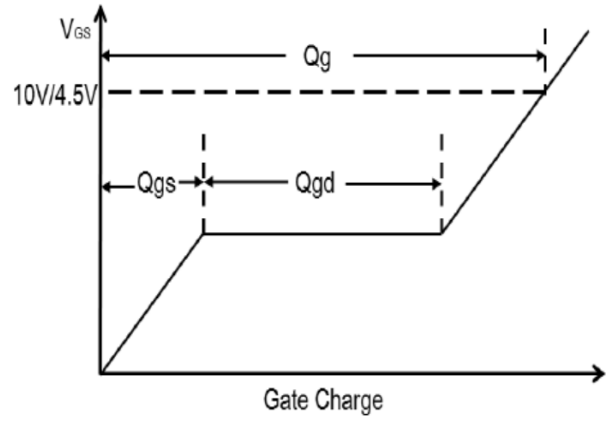


Fig.8 Gate Charge Waveform

Package Dimension

DFN5X6-8L



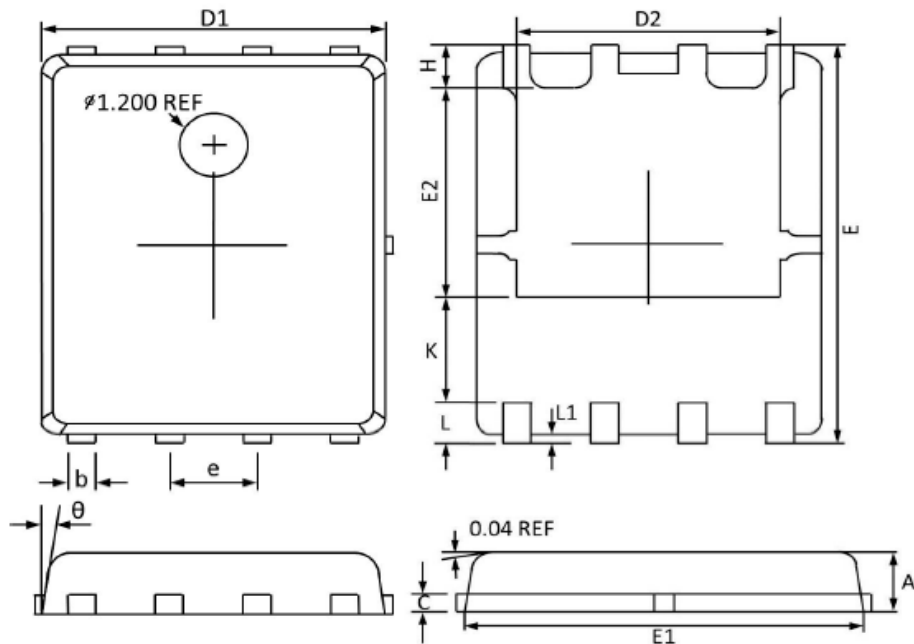



Dimensions



Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.036	0.043
b	0.330	0.510	0.013	0.020
c	0.200	0.300	0.008	0.011
D1	4.800	5.100	0.189	0.201
D2	3.610	4.100	0.142	0.161
E	5.900	6.200	0.232	0.244
E1	5.700	5.900	0.224	0.232
E2	3.350	3.780	0.132	0.149
e	1.270 (BSC)		0.050 (BSC)	
H	0.410	0.700	0.016	0.028
K	1.100	1.500	0.043	0.059
L	0.510	0.710	0.020	0.028
L1	0.060	0.200	0.002	0.008
θ	0°	12°	0°	12°

NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587